PROPOSED 02 STORIES BUILIDING

HBH- HENBEDHOO HIYA


CLIENT

ARCHITECTURAL DRAWINGS

The contents of these drawings remain as a


LIST OF DRAWINGS

SHEET NUMBER	SHEET NAME	SHEET ISSUE DATE	CURRENT REVISION	CURRENT REVISION DATE
00-GENERAL				
00-000-000-01	COVER PAGE	-	00	
00-000-000-02	LIST OF DRAWINGS	-	00	
00-000-000-03	LOCATION PLAN	-	00	
10 - GENERAL ARRANGEMENT				
10-100-L00-01	GROUND FLOOR PLAN	-	00	
10-100-L01-01	FIRST FLOOR PLAN	-	00	
10-100-R01-01	ROOF PLAN	-	00	
10-200-000-01	SECTIONS	-	00	
10-300-000-01	ELEVATIONS	-	00	
10-500-000-01	3D VIEWS	-	00	
11 - PARTIAL / ENLARGED PLANS				
11-100-L00-01	DIMENSION PLAN - GROUND FLOOR	-	00	
11-100-L01-01	DIMENSION PLAN - FIRST FLOOR	-	00	
19 - DOORS				
19-400-000-01	DOOR SCHEDULE & DETAILS 1	-	00	
19-400-000-02	DOOR SCHEDULE & DETAILS 2	-	00	
19-400-000-03	DOOR SCHEDULE & DETAILS 3	-	00	
20 -WINDOWS				
20-400-000-01	WINDOW SCHEDULE & DETAILS	-	00	
21 - CEILING				
21-100-L00-01	REFLECTED CEILING PLAN - GROUND FLOOR	-	00	
23-100-L01-01	REFLECTED CEILING PLAN - FIRST FLOOR	-	00	
23 - FINISHES				
23-100-L00-01	FINISHES PLAN - GROUND FLOOR	-	00	
23-100-L01-01	FINISHES PLAN - FIRST FLOOR	-	00	
24 - TYPICAL DETAILS				
24-600-000-01	TYPICAL DETAILS	-	00	

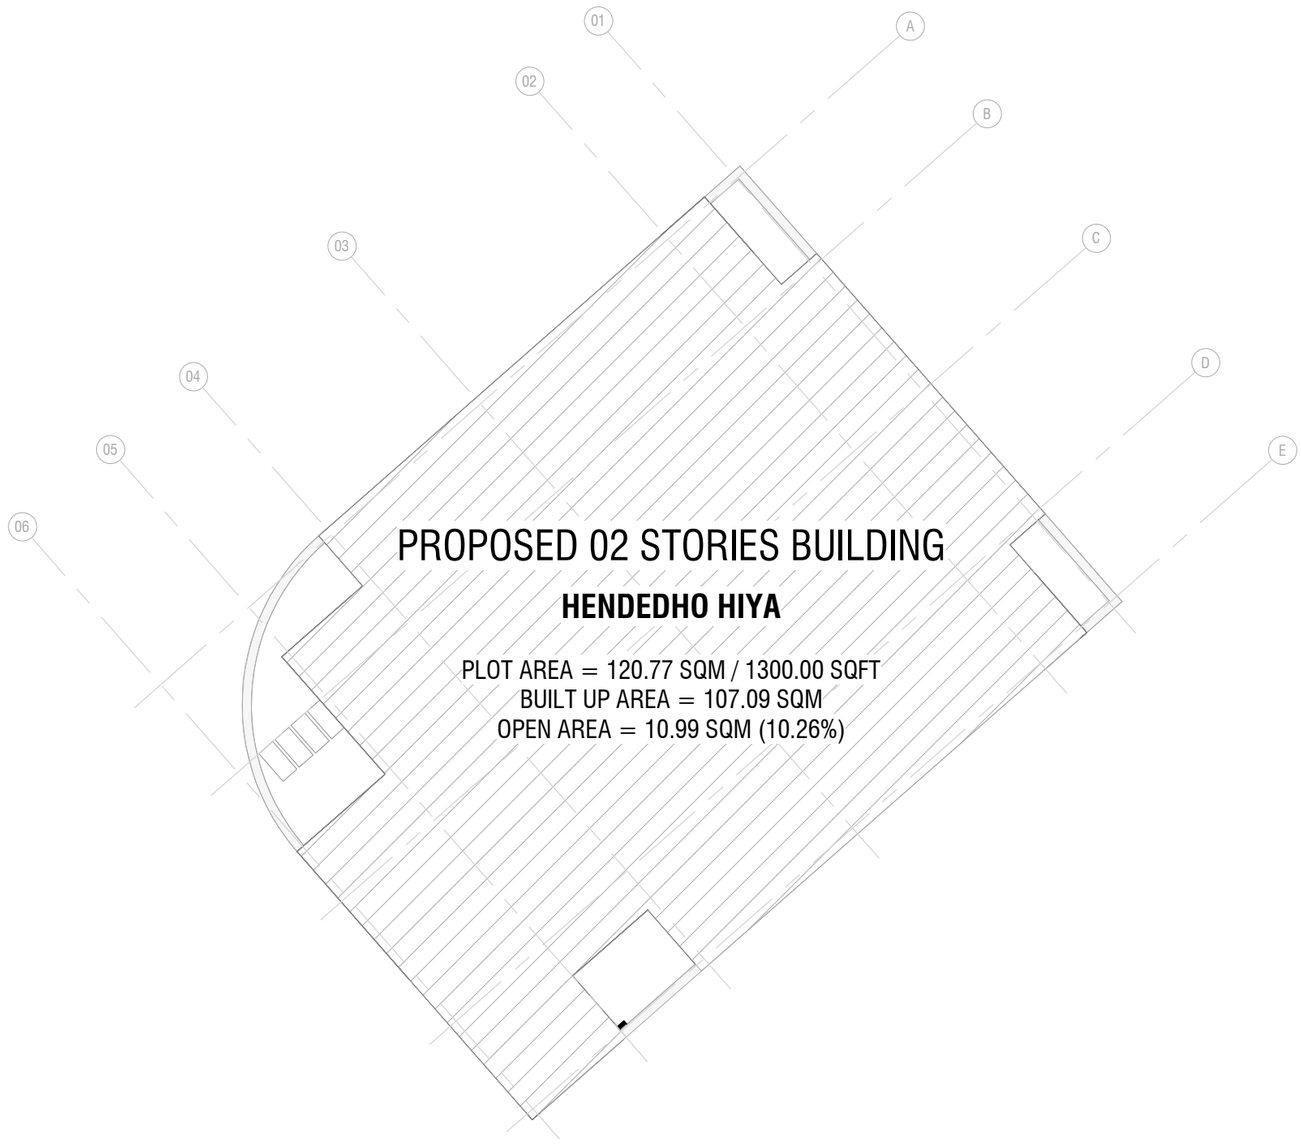


LOCATION PLAN

1 : 100

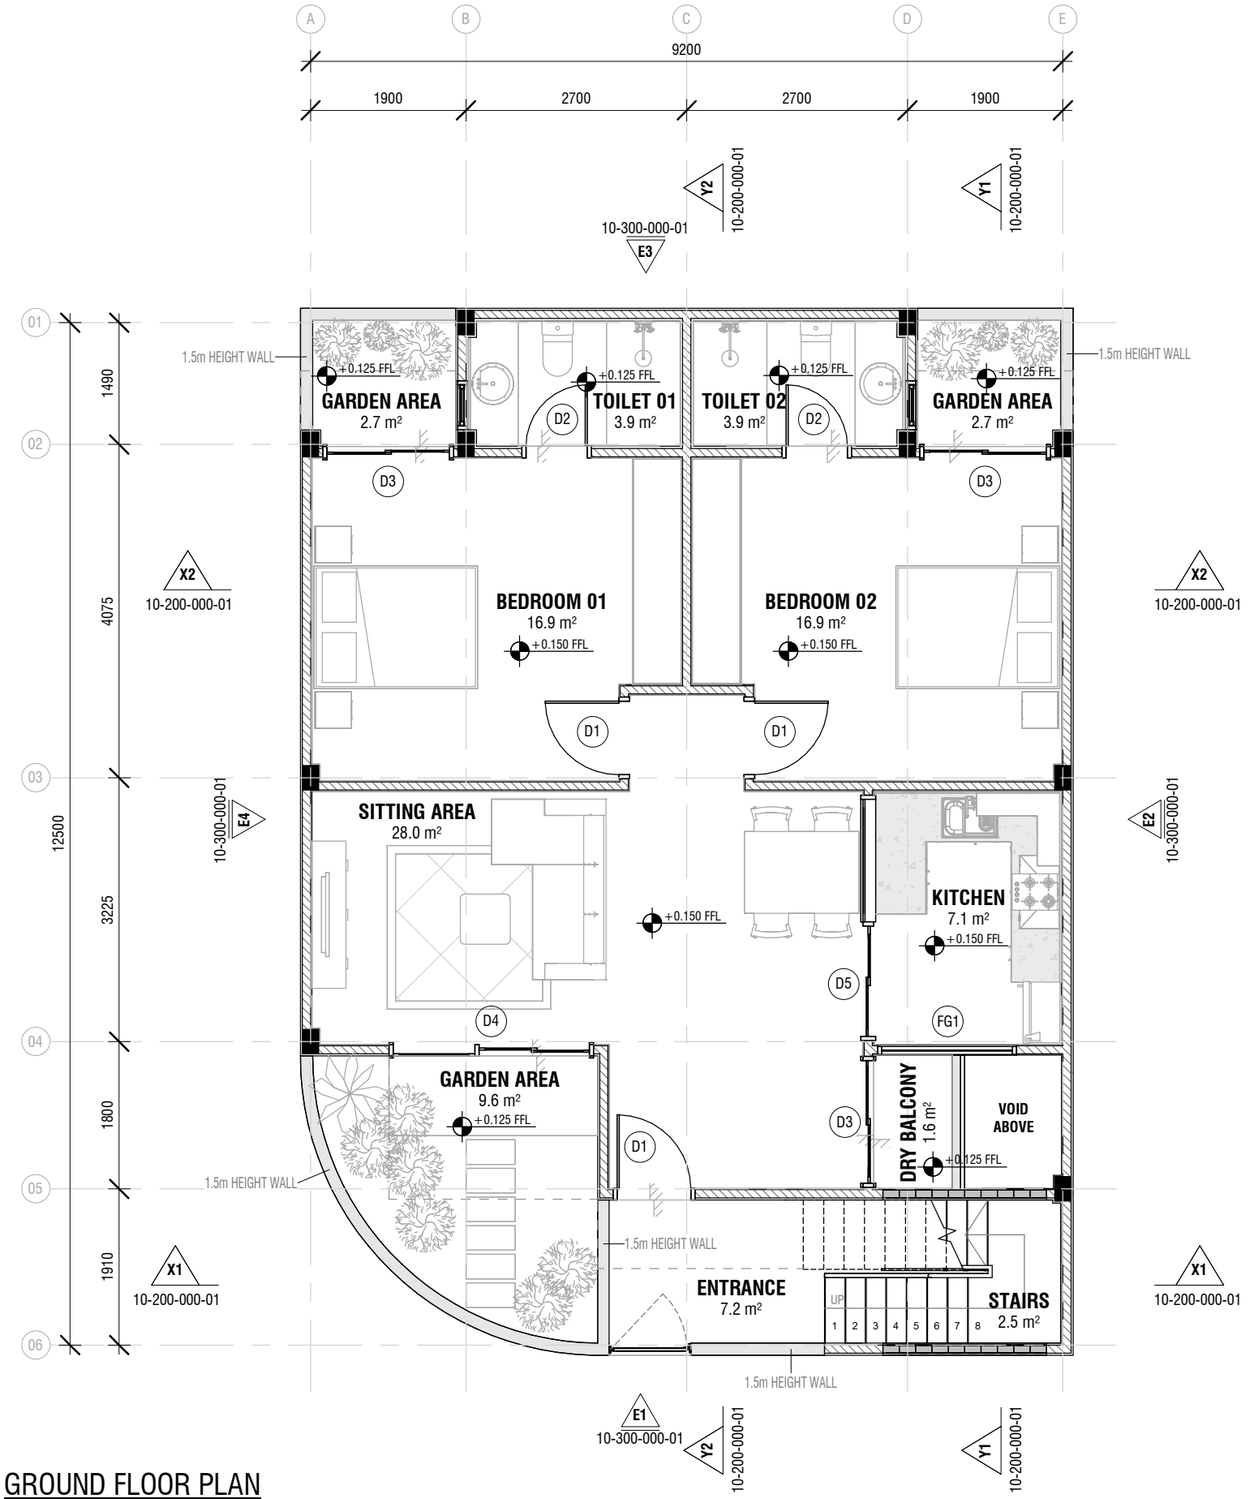


GROUND FLOOR PLAN

1 : 75

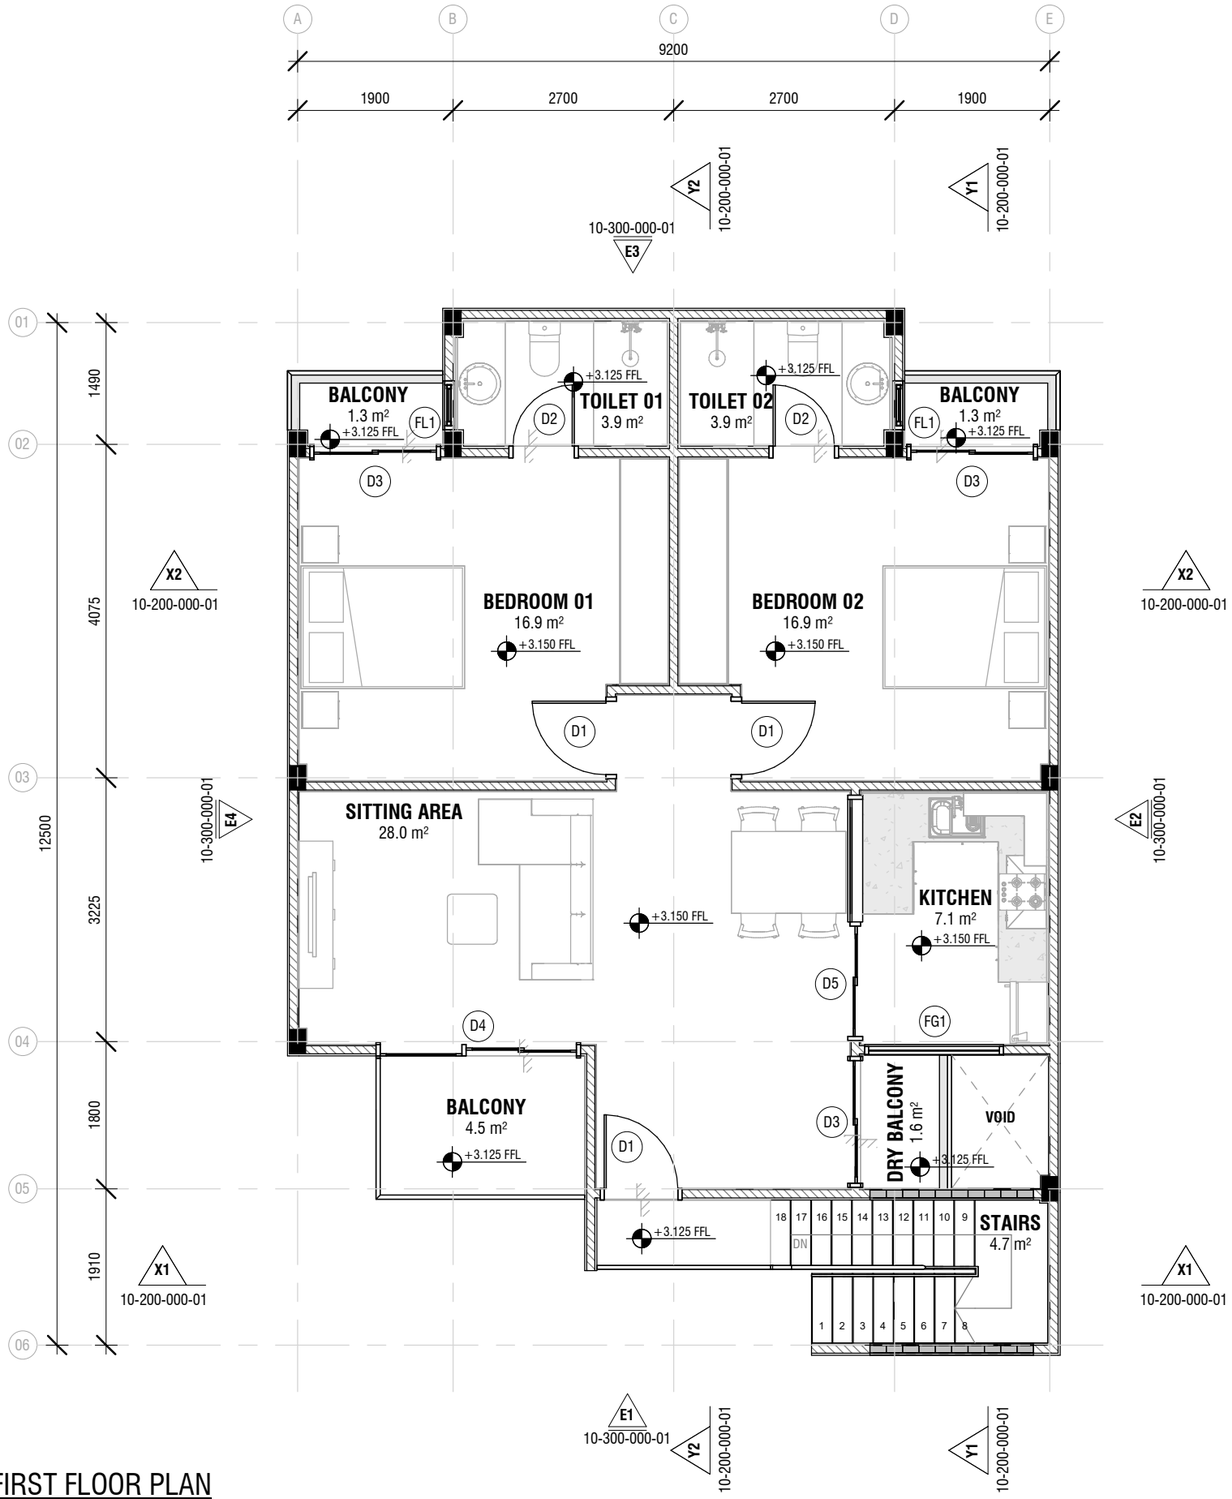


FIRST FLOOR PLAN

1 : 75

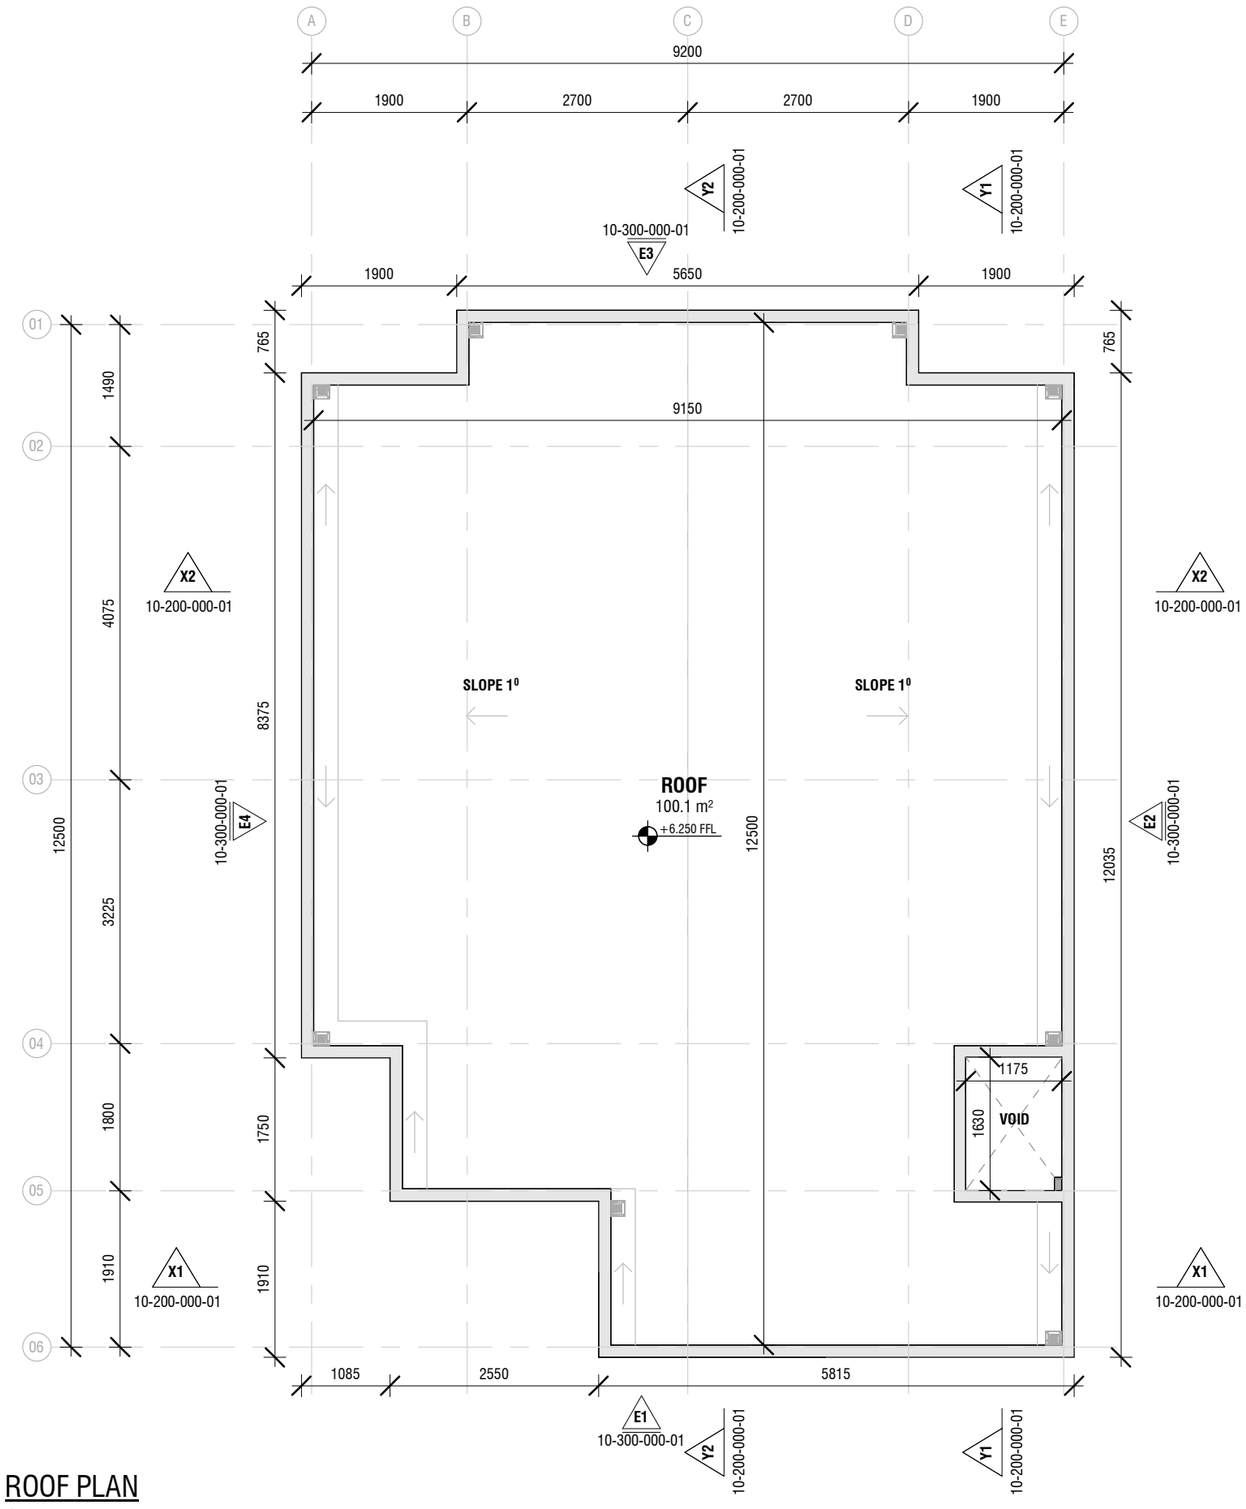


ROOF PLAN

1 : 75

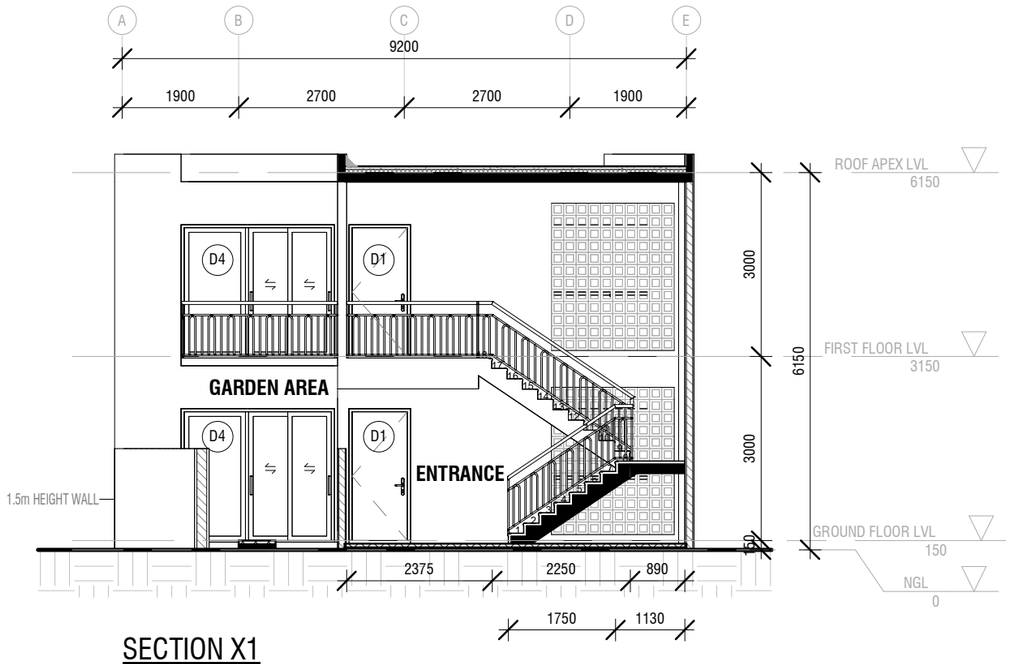


SECTION X1

1 : 100

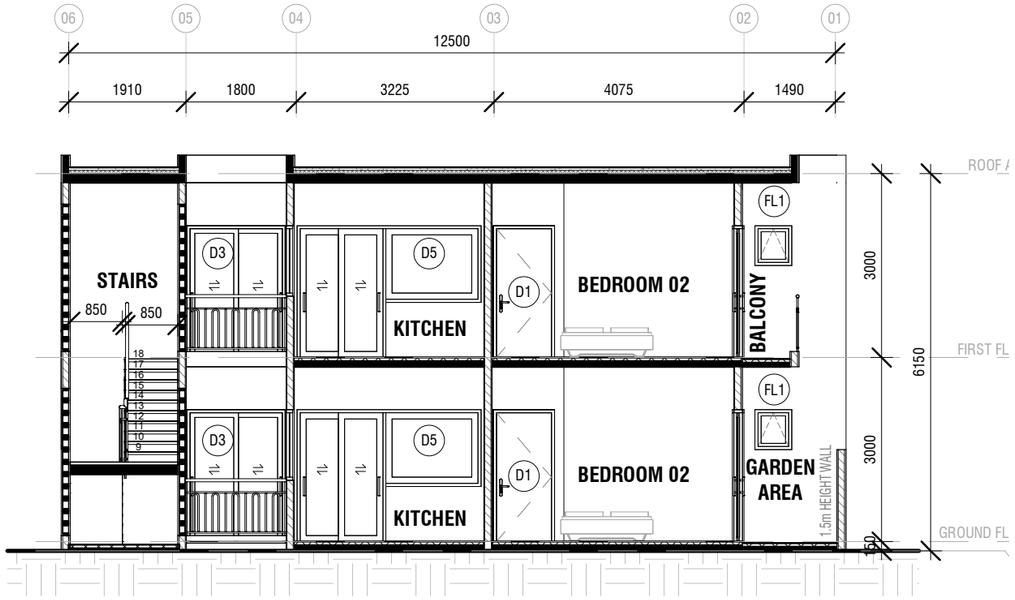


SECTION Y1

1 : 100

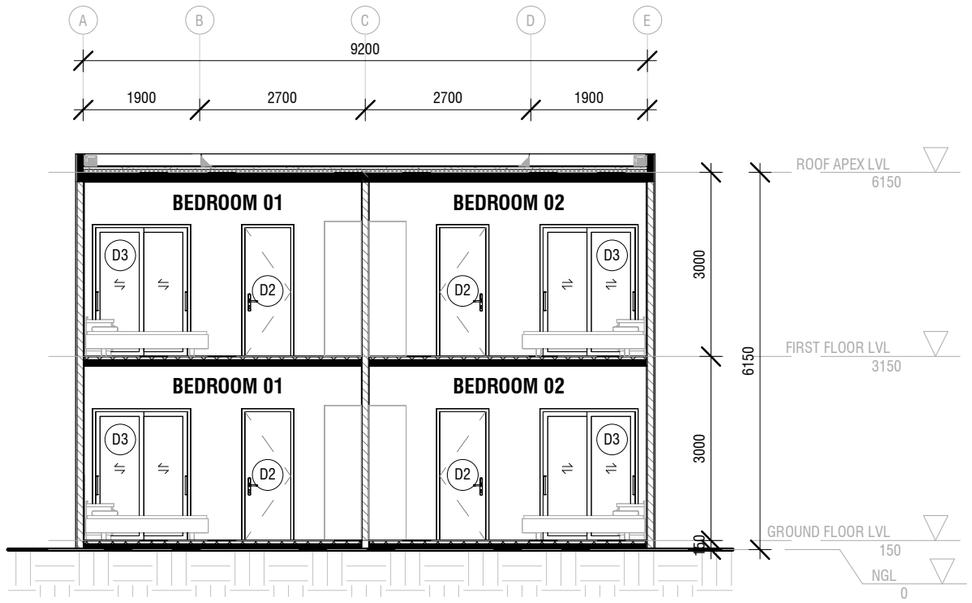


SECTION X2

1 : 100

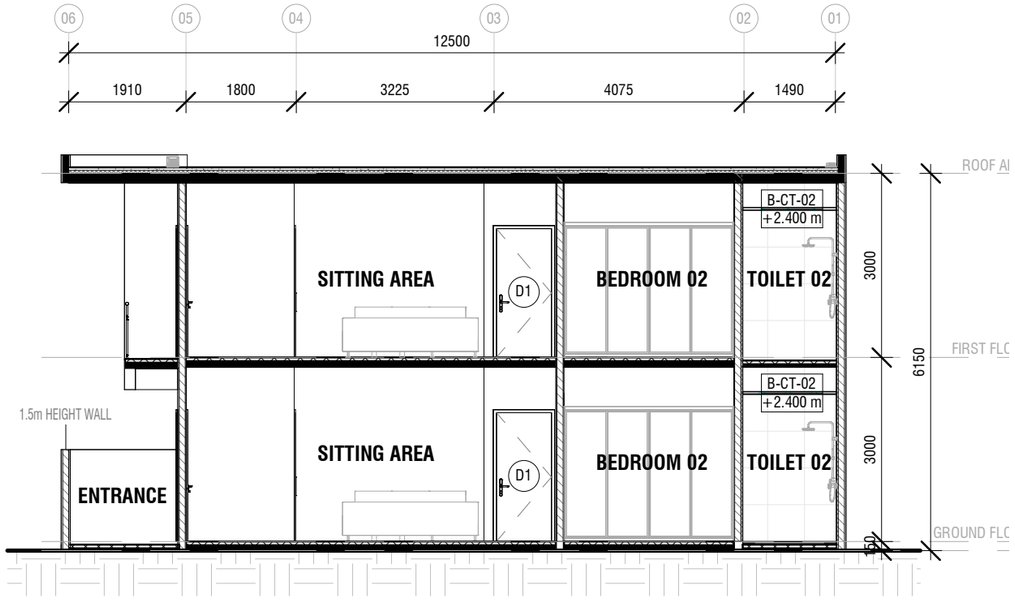


SECTION Y2

1 : 100

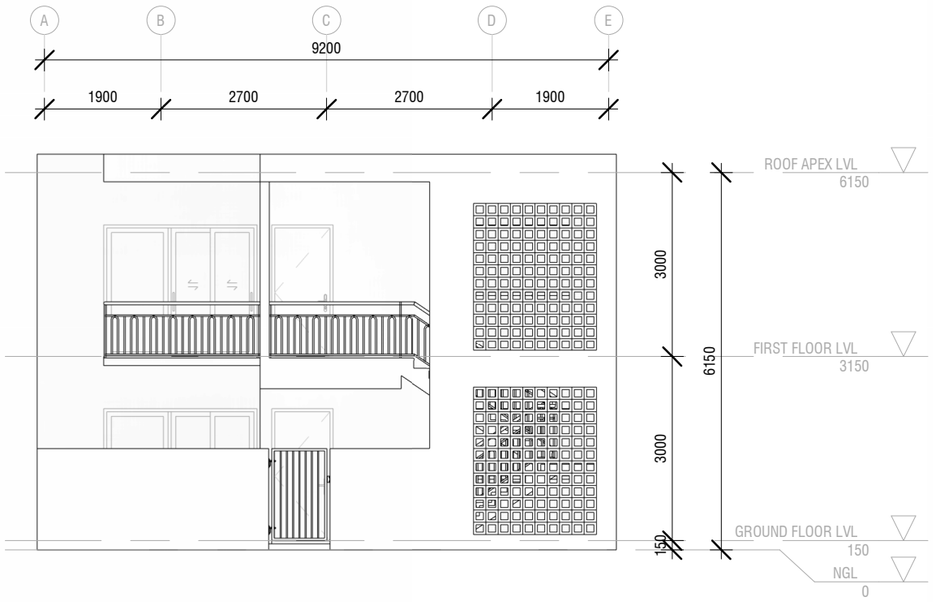


ELEVATION 01

1 : 100

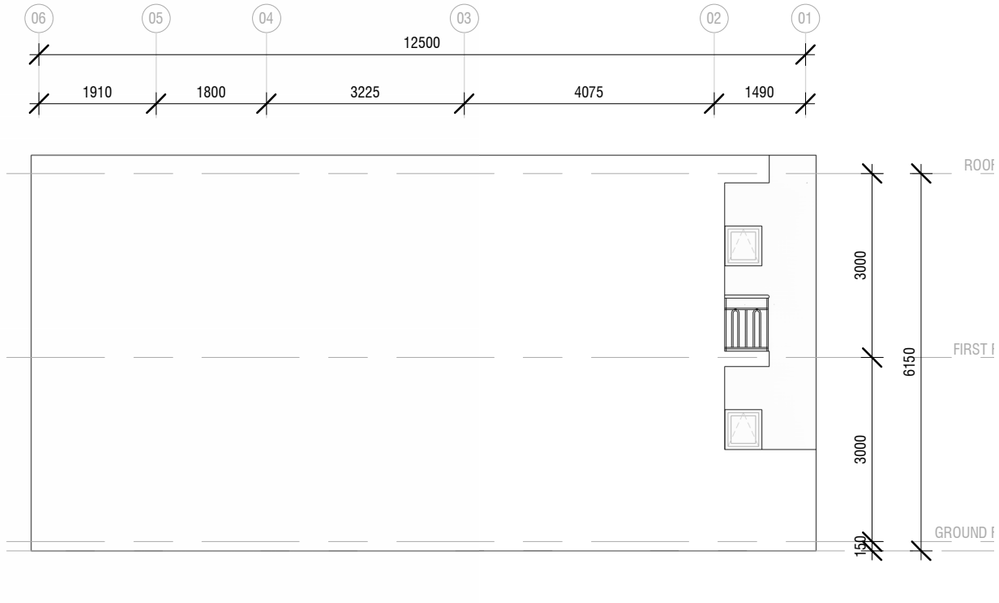


ELEVATION 02

1 : 100

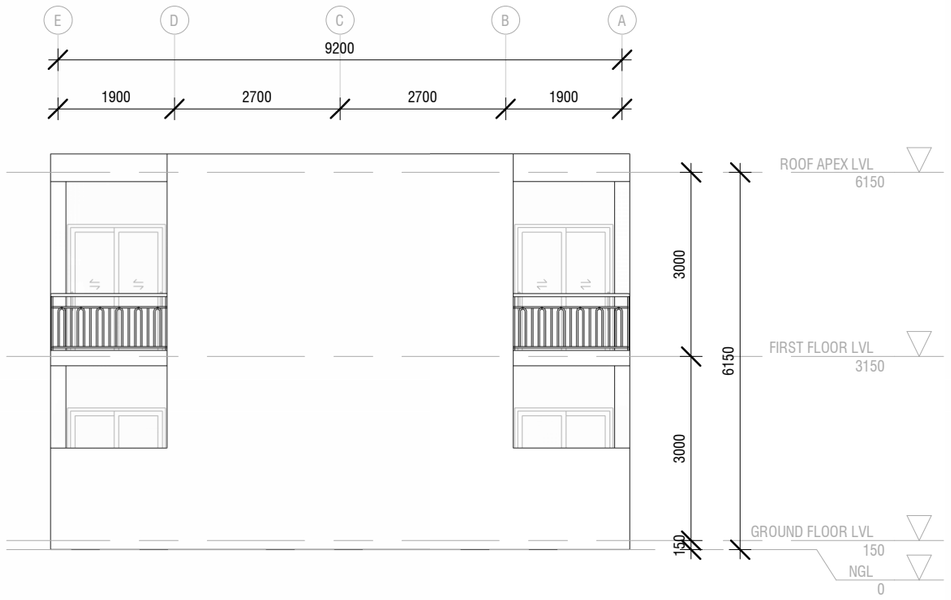


ELEVATION 03

1 : 100

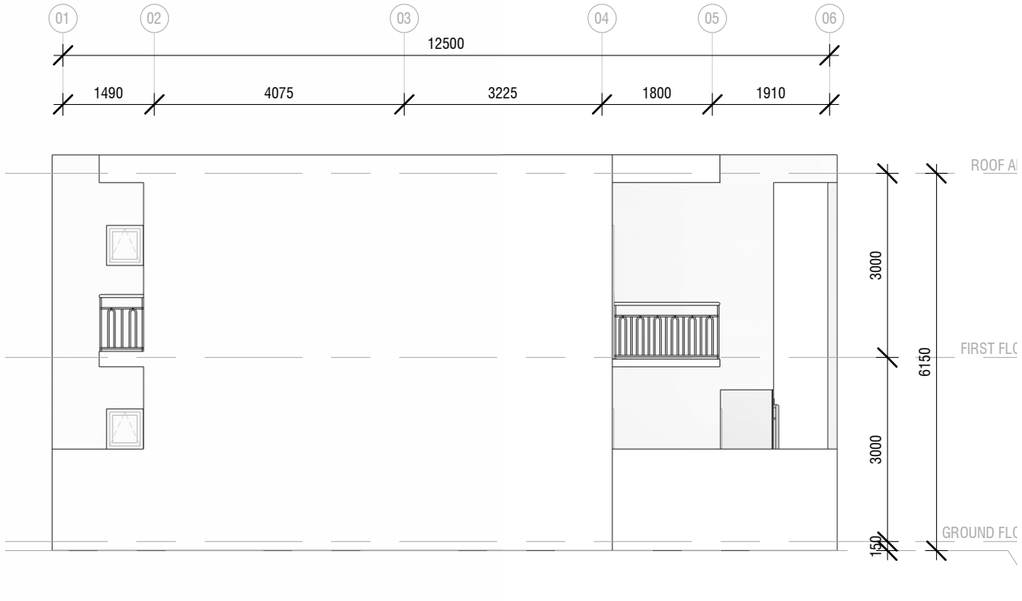


ELEVATION 04


1 : 100

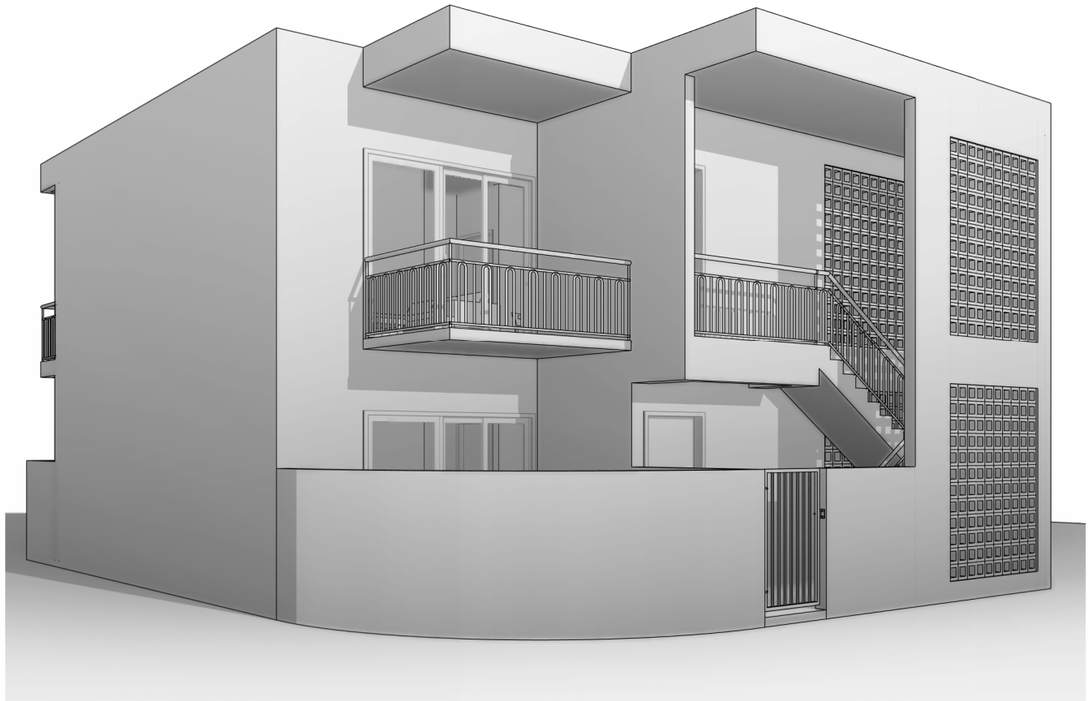


3D VIEW 01

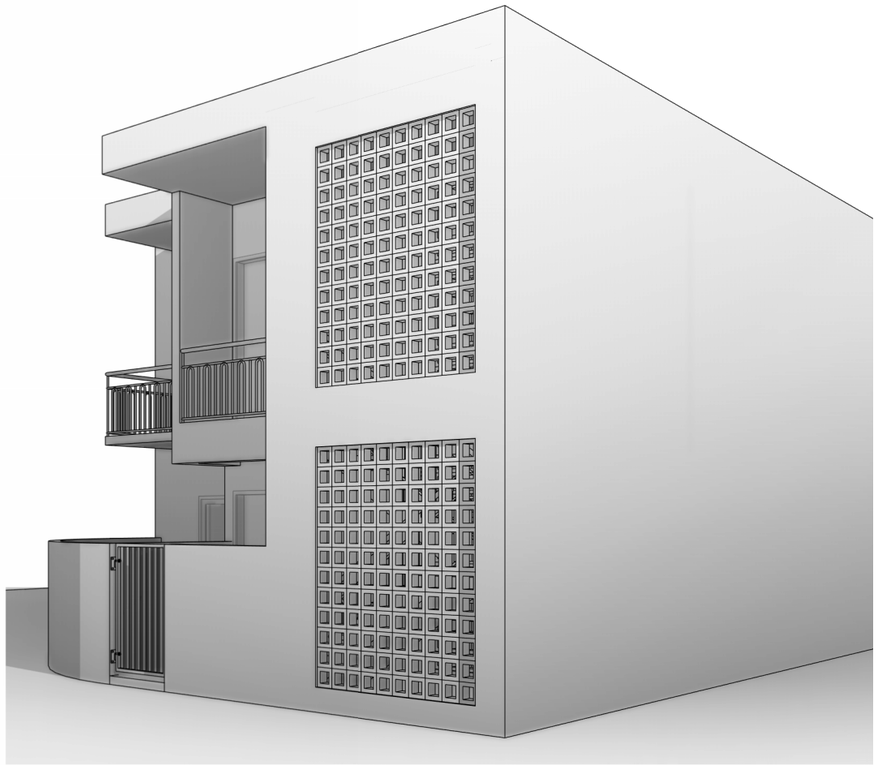


3D VIEW 02

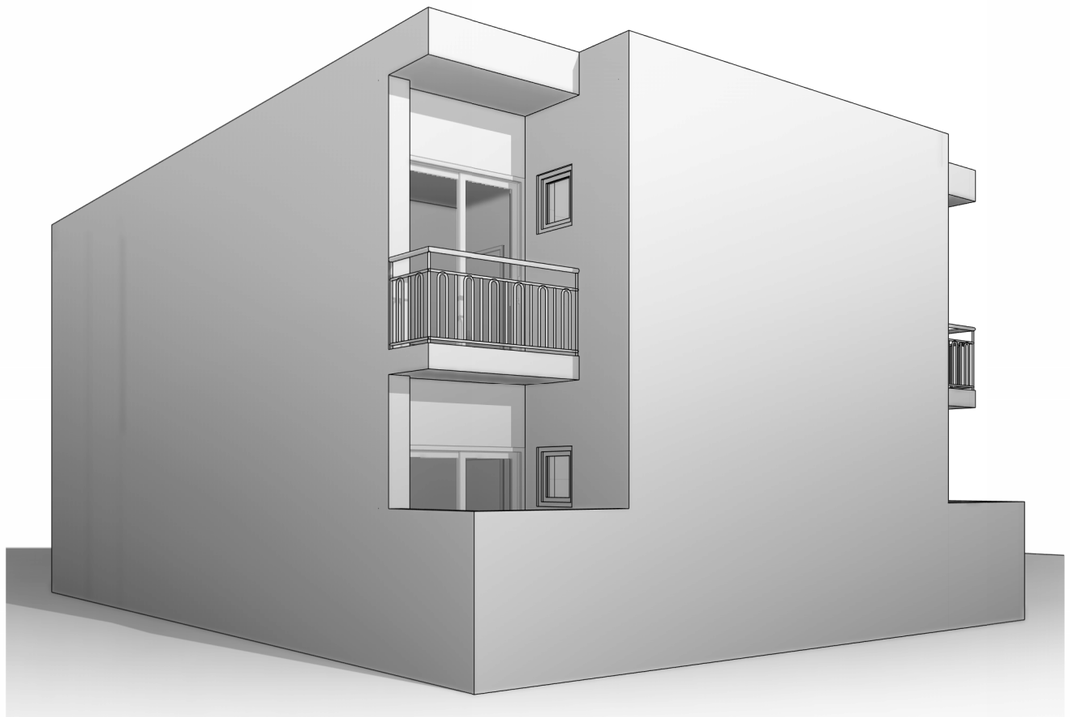

3D VIEW 03

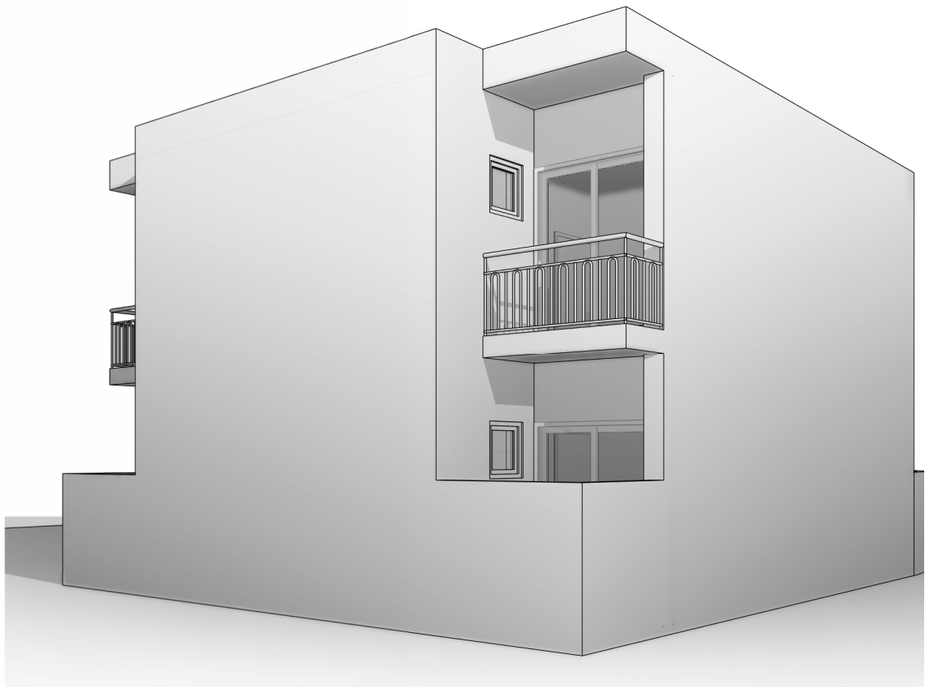


3D VIEW 04

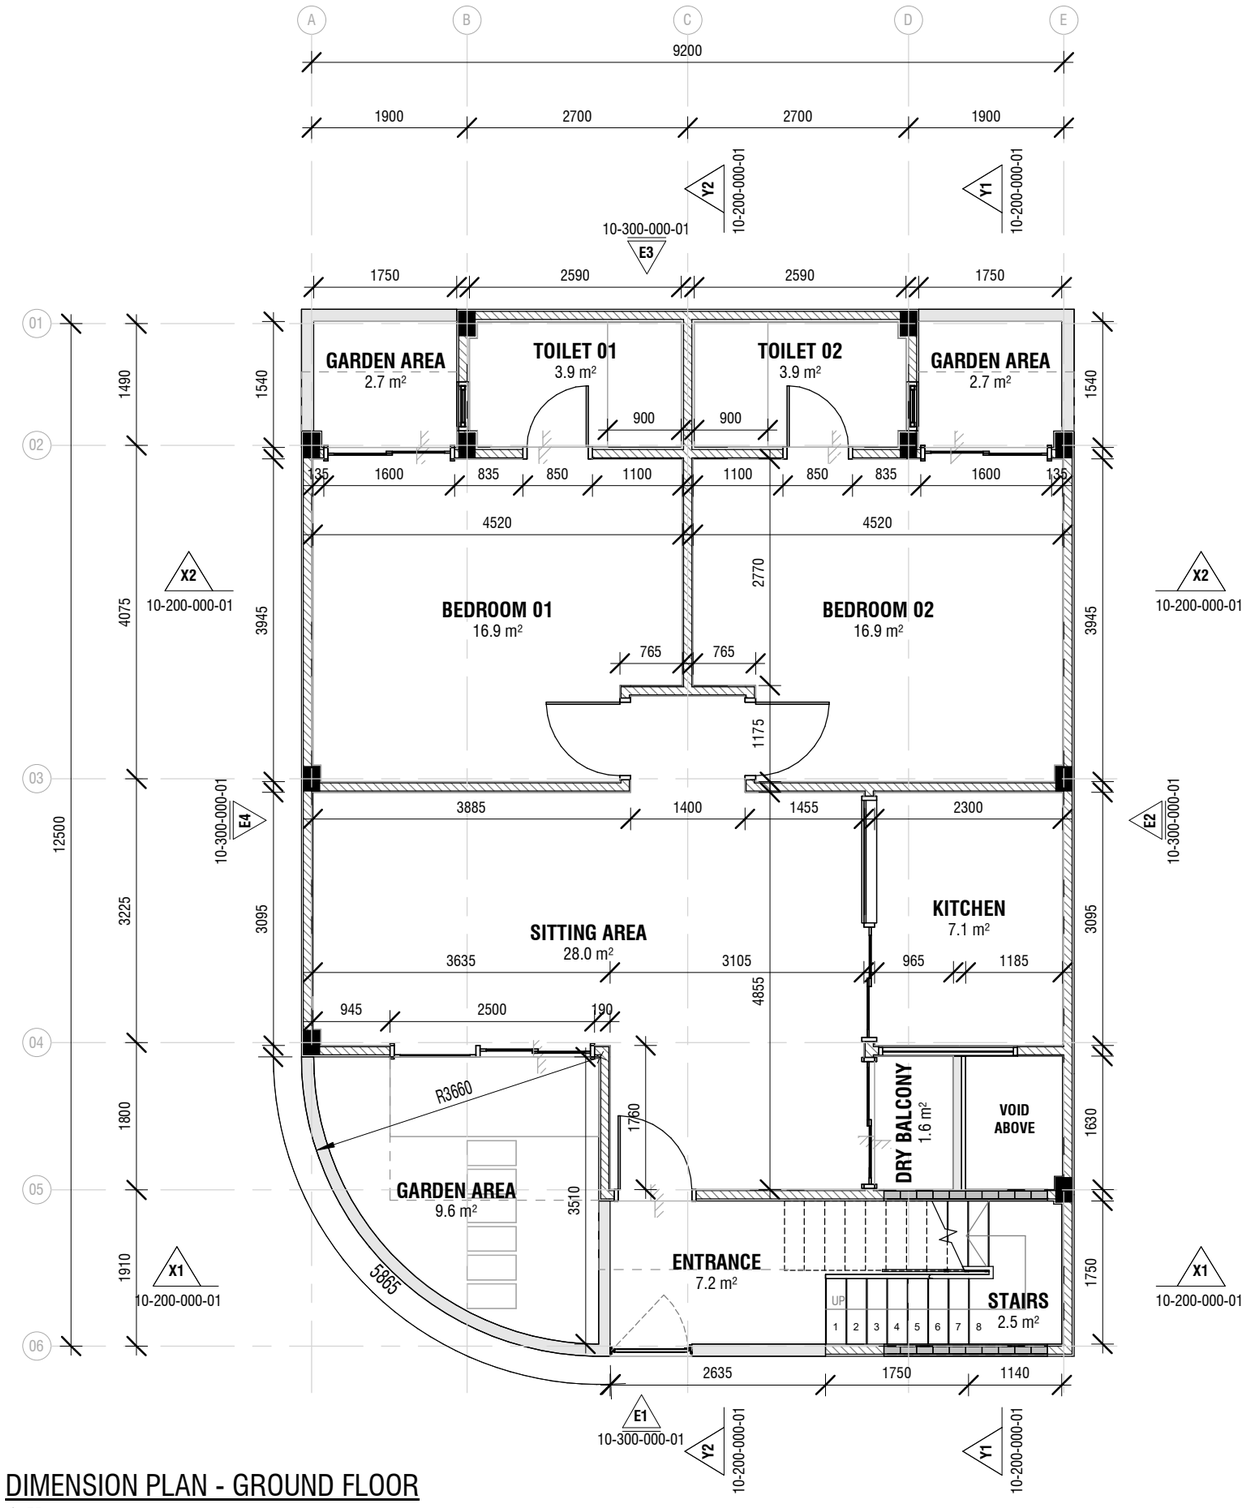


DIMENSION PLAN - GROUND FLOOR

1 : 75

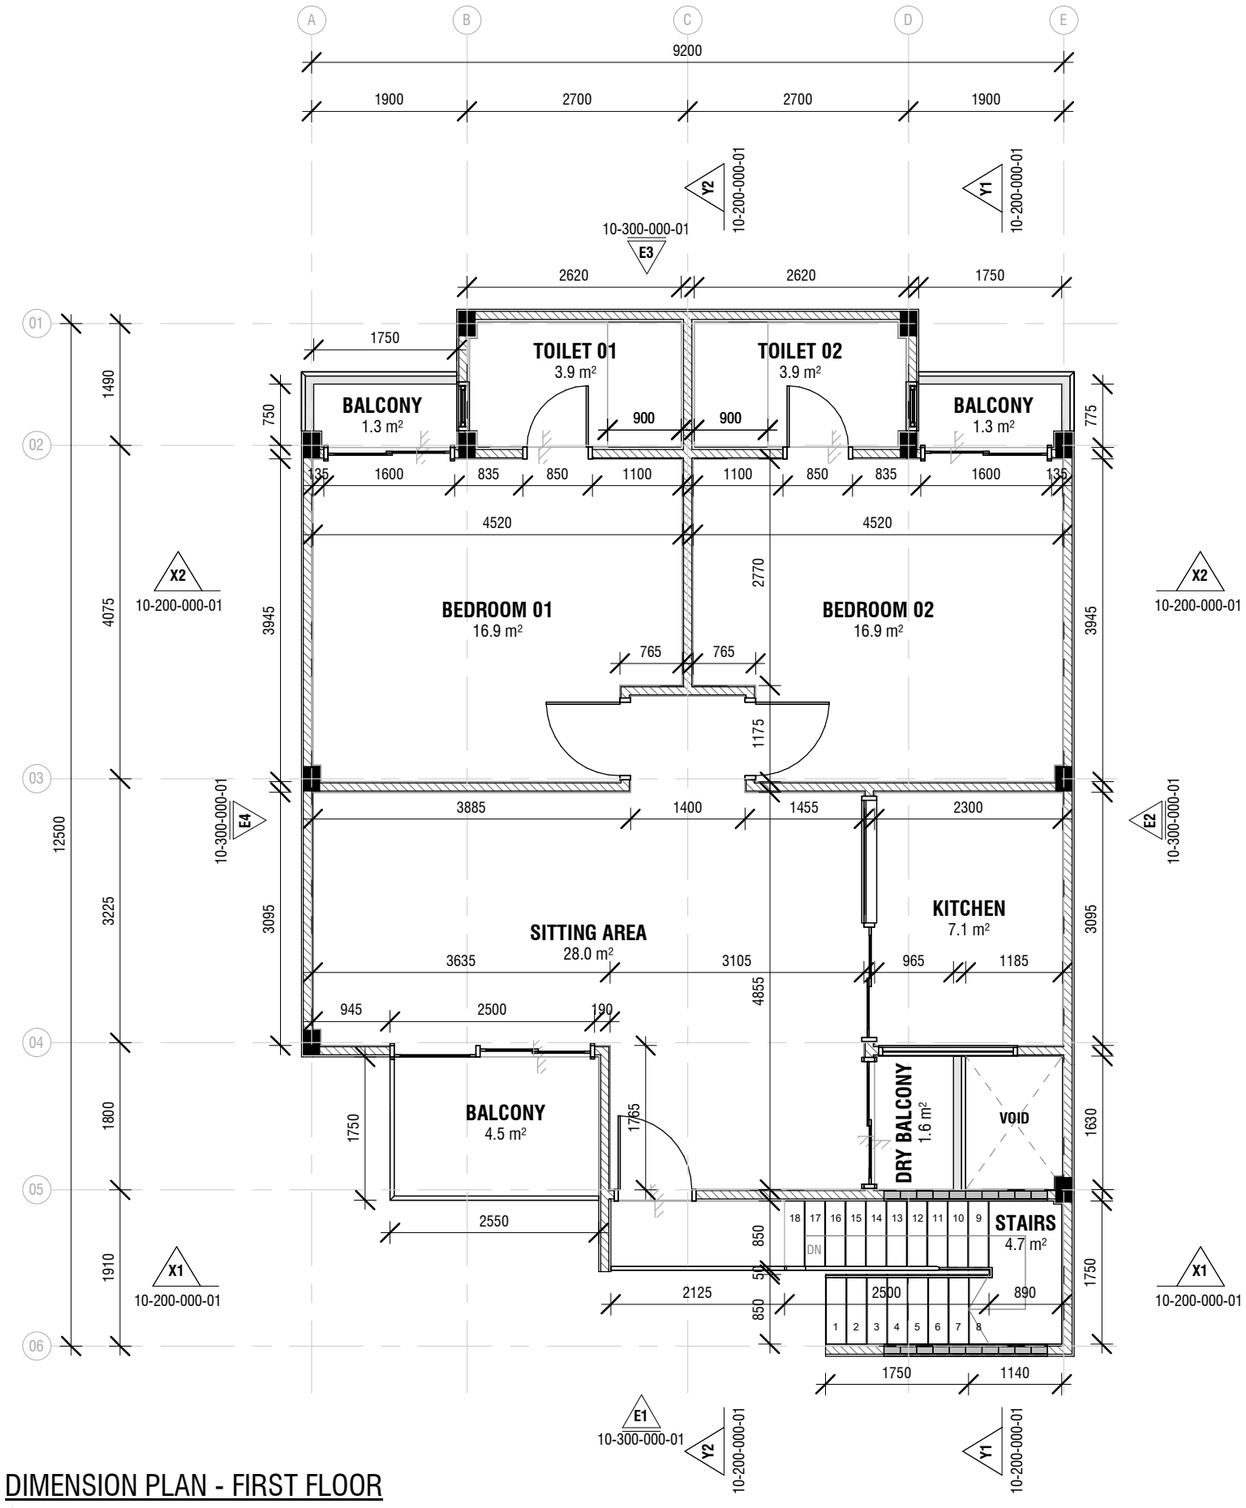


DIMENSION PLAN - FIRST FLOOR

1 : 75

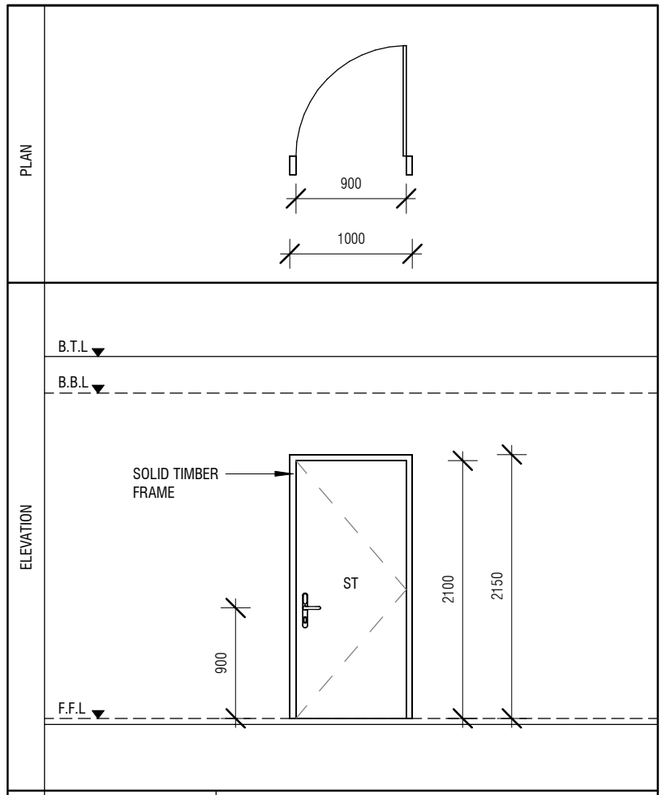

GENERAL	LOCATION	HBH - SITTING AREA, BEDROOMS		
	TAG	D1		
	WALL OPENING DIM.	1000x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	06 NOS.	OPEN AREA	2.15 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	SOLID TIMBER
	FINISH	TIMBER FINISH		
DOOR PANEL	MATERIAL	SOLID TIMBER		
	FINISH	TIMBER FINISH		
	INTERNAL PANEL TYPE	SOLID TIMBER PANEL		
	FIRE RATING	1HR		
	ACOUSTIC RATING	(N/A)		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK SET	HAFFLE OR EQUIVALENT		
	DOOR VIEWER	(N/A)		
	DOOR CLOSER	YES		
	SOFT CLOSING	YES		
	FLUSH BOLTS	YES		
	DOOR STOPPER	YES		
	RUBBER SEAL	YES		
	KICK PLATE	NO		
	ACCESS CONTROL	CARD ACCESS		

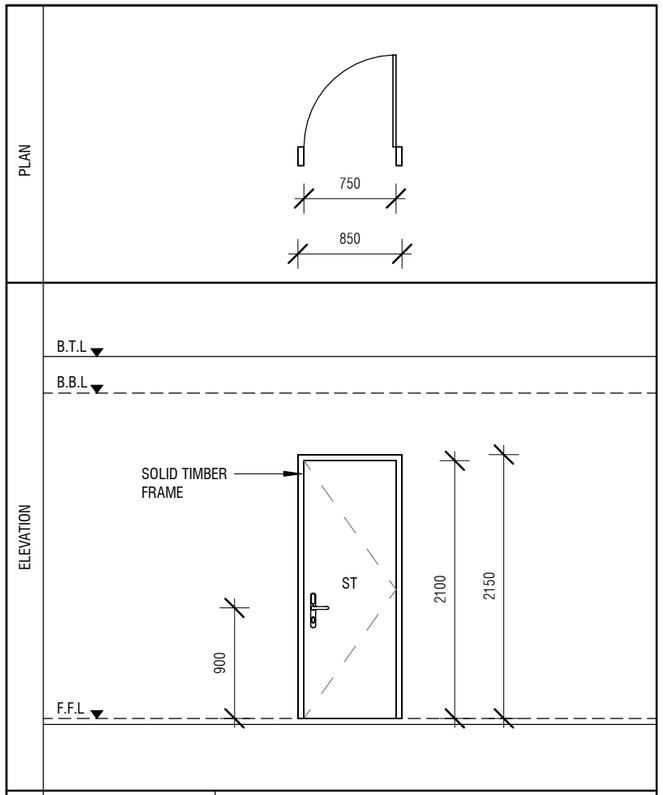

GENERAL	LOCATION	HBH - TOILETS		
	TAG	D2		
	WALL OPENING DIM.	850x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	04 NOS.	OPEN AREA	1.83 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	SOLID TIMBER
	FINISH	TIMBER FINISH		
DOOR PANEL	MATERIAL	SOLID TIMBER		
	FINISH	TIMBER FINISH		
	INTERNAL PANEL TYPE	SOLID TIMBER PANEL		
	FIRE RATING	1HR		
	ACOUSTIC RATING	(N/A)		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK SET	HAFFLE OR EQUIVALENT		
	DOOR VIEWER	(N/A)		
	DOOR CLOSER	YES		
	SOFT CLOSING	YES		
	FLUSH BOLTS	YES		
	DOOR STOPPER	YES		
	RUBBER SEAL	YES		
	KICK PLATE	NO		
	ACCESS CONTROL	THUMB LOCK		

DOOR SCHEDULE 1

1 : 50

LEGEND


TG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL

NOTE


- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PL
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (L ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)

VENTILATION SCHEDULE - DOOR

DOOR / OPENING NUMBER	ROOM AREA	REQUIRED OPENING AREA	DESIGNED DOOR/ OPEN AREA	OPEN%
GROUND FLOOR LVL				
D3	16.9 m²	1.69 m²	3.2 m²	18.63%
BEDROOM 01			3.2 m²	18.63%
D3	16.9 m²	1.69 m²	3.2 m²	18.63%
BEDROOM 02			3.2 m²	18.63%
D1	28.0 m²	2.80 m²	2.2 m²	7.69%
D3	28.0 m²	2.80 m²	3.2 m²	11.27%
D4	28.0 m²	2.80 m²	3.0 m²	10.89%
SITTING AREA			8.3 m²	29.86%
FIRST FLOOR LVL				
D3	16.9 m²	1.69 m²	3.2 m²	18.63%
BEDROOM 01			3.2 m²	18.63%
D3	16.9 m²	1.69 m²	3.2 m²	18.63%
BEDROOM 02			3.2 m²	18.63%
D1	28.0 m²	2.80 m²	2.2 m²	7.69%
D3	28.0 m²	2.80 m²	3.2 m²	11.27%
SITTING AREA			5.3 m²	18.96%

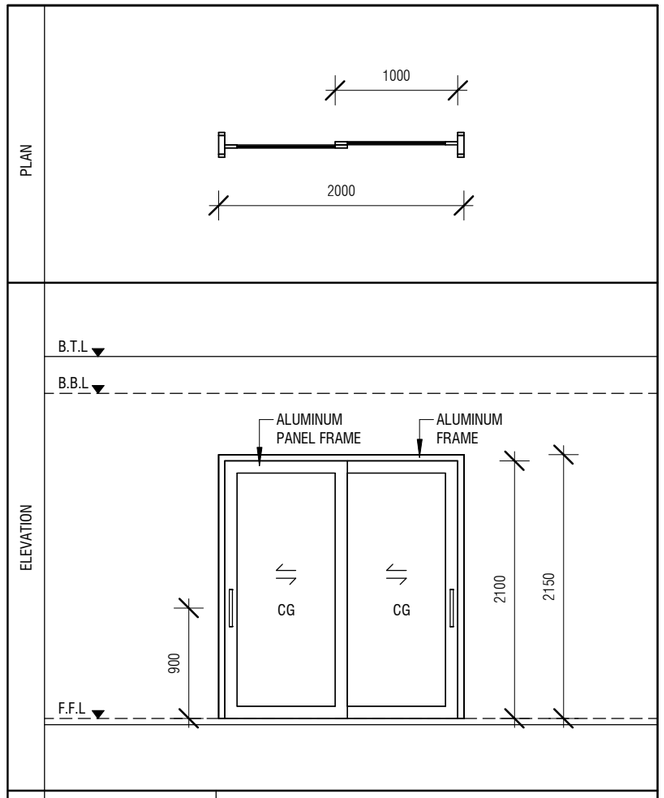

GENERAL	LOCATION	HBH - GARDEN AREA, DRY BALCONY		
	TAG	D3		
	WALL OPENING DIM.	2000x2150mm (W x H)	TYPE	2 PANEL SLIDING DOOR
	QUANTITY	06 NOS.	OPEN AREA	4.30 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	80 MICRON POWDER COATED ALUMINUM
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
DOOR PANEL	MATERIAL	80 MICRON POWDER COATED ALUMINUM		
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
	INTERNAL PANEL TYPE	12 mm THK TEMPERED CLEAR GLASS		
	FIRE RATING	1HR		
	ACOUSTIC RATING	(N/A)		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK SET	HAFFLE OR EQUIVALENT		
	DOOR VIEWER	(N/A)		
	DOOR CLOSER	NO		
	SOFT CLOSING	NO		
	FLUSH BOLTS	YES		
	DOOR STOPPER	NO		
	RUBBER SEAL	YES		
	KICK PLATE	NO		
	ACCESS CONTROL	KEY		

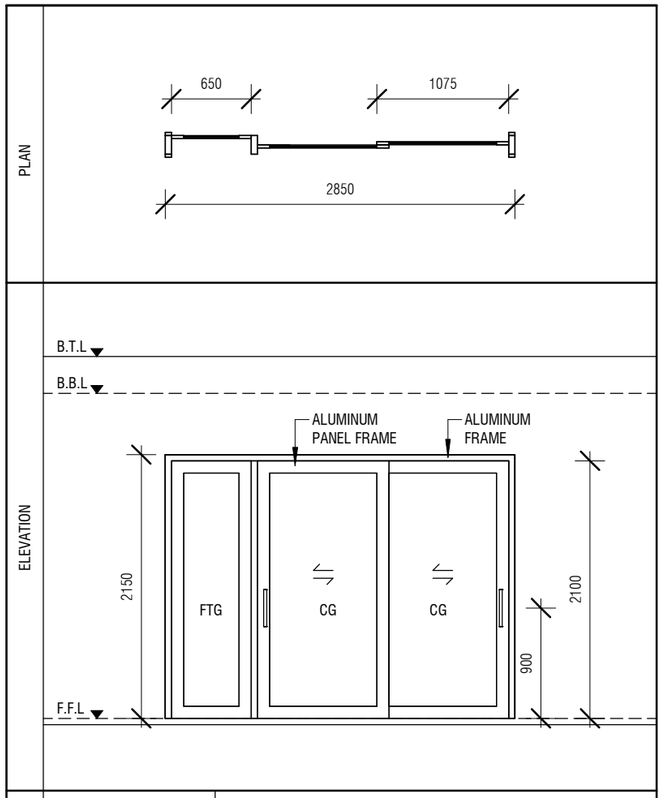

GENERAL	LOCATION	HBH - SITTING AREA		
	TAG	D4		
	WALL OPENING DIM.	2850x2150mm (W x H)	TYPE	2 PANEL SLIDING DOOR + 1 SIDE FIXED PANEL
	QUANTITY	02 NOS.	OPEN AREA	6.13 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	80 MICRON POWDER COATED ALUMINUM
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
DOOR PANEL	MATERIAL	80 MICRON POWDER COATED ALUMINUM		
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
	INTERNAL PANEL TYPE	12 mm THK TEMPERED CLEAR GLASS		
	FIRE RATING	1HR		
	ACOUSTIC RATING	(N/A)		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK SET	HAFFLE OR EQUIVALENT		
	DOOR VIEWER	(N/A)		
	DOOR CLOSER	NO		
	SOFT CLOSING	NO		
	FLUSH BOLTS	YES		
	DOOR STOPPER	NO		
	RUBBER SEAL	YES		
	KICK PLATE	NO		
	ACCESS CONTROL	KEY		

LEGEND

TG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL


NOTE

- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PL
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (L ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)


DOOR SCHEDULE 2

1 : 50

PLAN

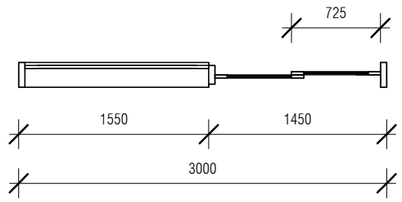

ELEVATION

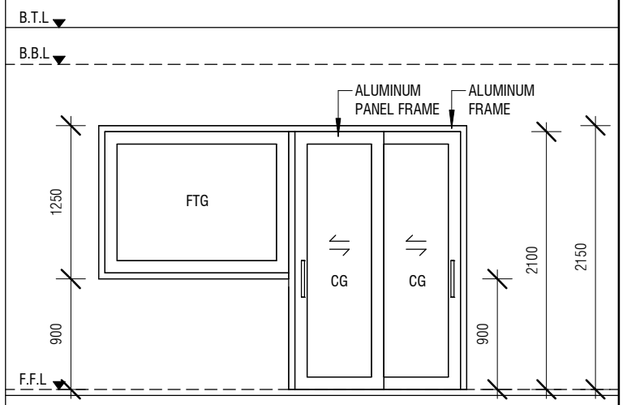

GENERAL	LOCATION	HBH - KITCHEN		
	TAG	D5		
	WALL OPENING DIM.	1450x2150mm (W x H) 1550x1250mm (W x H)	TYPE	2 PANEL SLIDING DOOR + 1 SIDE SHORT FG
	QUANTITY	02 NOS.	OPEN AREA	5.06 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	80 MICRON POWDER COATED ALUMINUM
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
DOOR PANEL	MATERIAL	80 MICRON POWDER COATED ALUMINUM		
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
	INTERNAL PANEL TYPE	12 mm THK TEMPERED CLEAR GLASS		
	FIRE RATING	1HR		
	ACOUSTIC RATING	(N/A)		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK SET	HAFFLE OR EQUIVALENT		
	DOOR VIEWER	(N/A)		
	DOOR CLOSER	NO		
	SOFT CLOSING	NO		
	FLUSH BOLTS	YES		
	DOOR STOPPER	NO		
	RUBBER SEAL	YES		
	KICK PLATE	NO		
	ACCESS CONTROL	KEY		

DOOR SCHEDULE 3


1 : 50

LEGEND


TG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL

NOTE

- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PL
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (L ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)

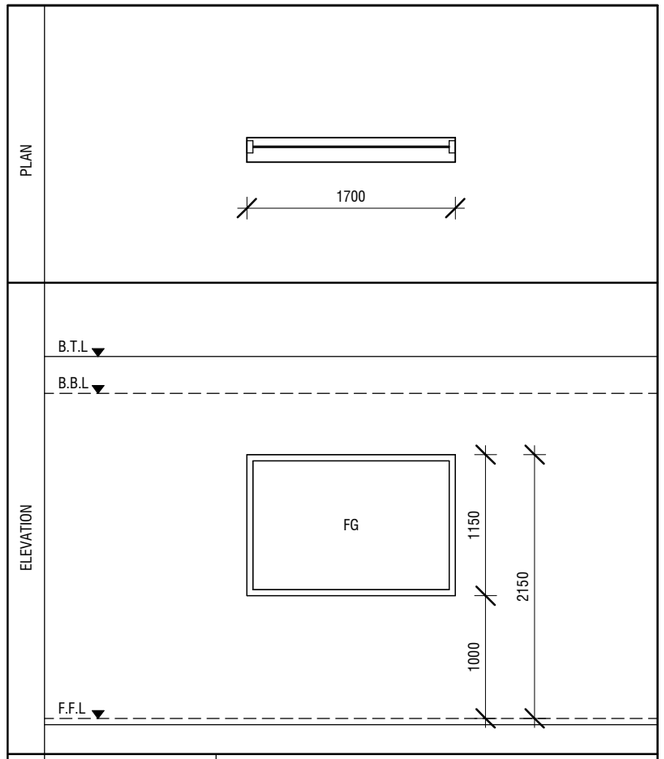

GENERAL	LOCATION	HBH - KITCHEN		
	TAG	FG1		
	WALL OPENING DIM.	1700x1150mm (W x H)	TYPE	FIXED GLASS
	QUANTITY	02 NOS.	OPEN AREA	1.96 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	80 MICRONS ALUMINUM POWDER COATED FRAME
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
WINDOW PANEL	MATERIAL	80 MICRONS ALUMINUM POWDER COATED FRAME		
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
	GLAZING	10mm THICK TEMPERED CLEAR GLASS		
	FIRE RATING	1HR		
	ACOUSTIC RATING	-		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK	HAFFLE OR EQUIVALENT		
	FLUSH BOLTS	HAFFLE OR EQUIVALENT		
	SHADING CANOPY	NO		

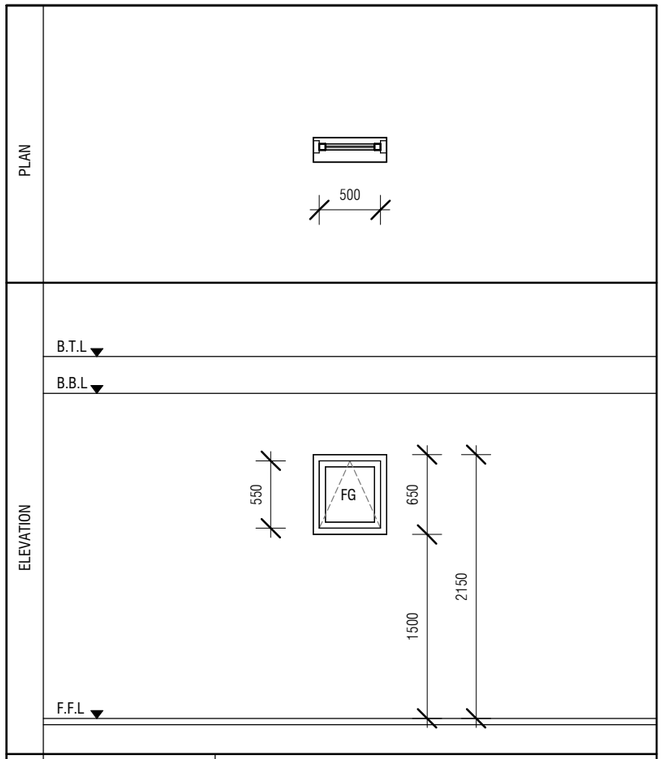

GENERAL	LOCATION	HBH - TOILETS		
	TAG	FL1		
	WALL OPENING DIM.	600x650mm (W x H)	TYPE	TOP HUNG SWING WINDOW
	QUANTITY	04 NOS.	OPEN AREA	0.39 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	80 MICRONS ALUMINUM POWDER COATED FRAME
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
WINDOW PANEL	MATERIAL	80 MICRONS ALUMINUM POWDER COATED FRAME		
	FINISH	GRAY : RAL 7021 - MATTE FINISH		
	GLAZING	10mm THICK TEMPERED CLEAR GLASS		
	FIRE RATING	1HR		
	ACOUSTIC RATING	-		
IRONMONGERY	HINGES/ SLIDING GEAR	HAFFLE OR EQUIVALENT		
	HANDLE	HAFFLE OR EQUIVALENT		
	LOCK	HAFFLE OR EQUIVALENT		
	FLUSH BOLTS	HAFFLE OR EQUIVALENT		
	SHADING CANOPY	NO		

WINDOW SCHEDULE

1 : 50

LEGEND


TG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL

NOTE

- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PL
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (L ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)

VENTILATION SCHEDULE - WINDOW

WINDOW / OPENING NUMBER	ROOM AREA	REQUIRED OPENING AREA	DESIGNED WINDOW / OPEN AREA	OPEN %
GROUND FLOOR LVL				
KITCHEN				
FG1	7.1 m²	0.71 m²	1.7 m²	23.60%
TOILET 01				
FL1	3.9 m²	0.39 m²	0.3 m²	7.01%
TOILET 02				
FL1	3.9 m²	0.39 m²	0.3 m²	7.01%
FIRST FLOOR LVL				
KITCHEN				
FG1	7.1 m²	0.71 m²	1.7 m²	23.60%
TOILET 01				
FL1	3.9 m²	0.39 m²	0.3 m²	7.01%
TOILET 02				
FL1	3.9 m²	0.39 m²	0.3 m²	7.01%

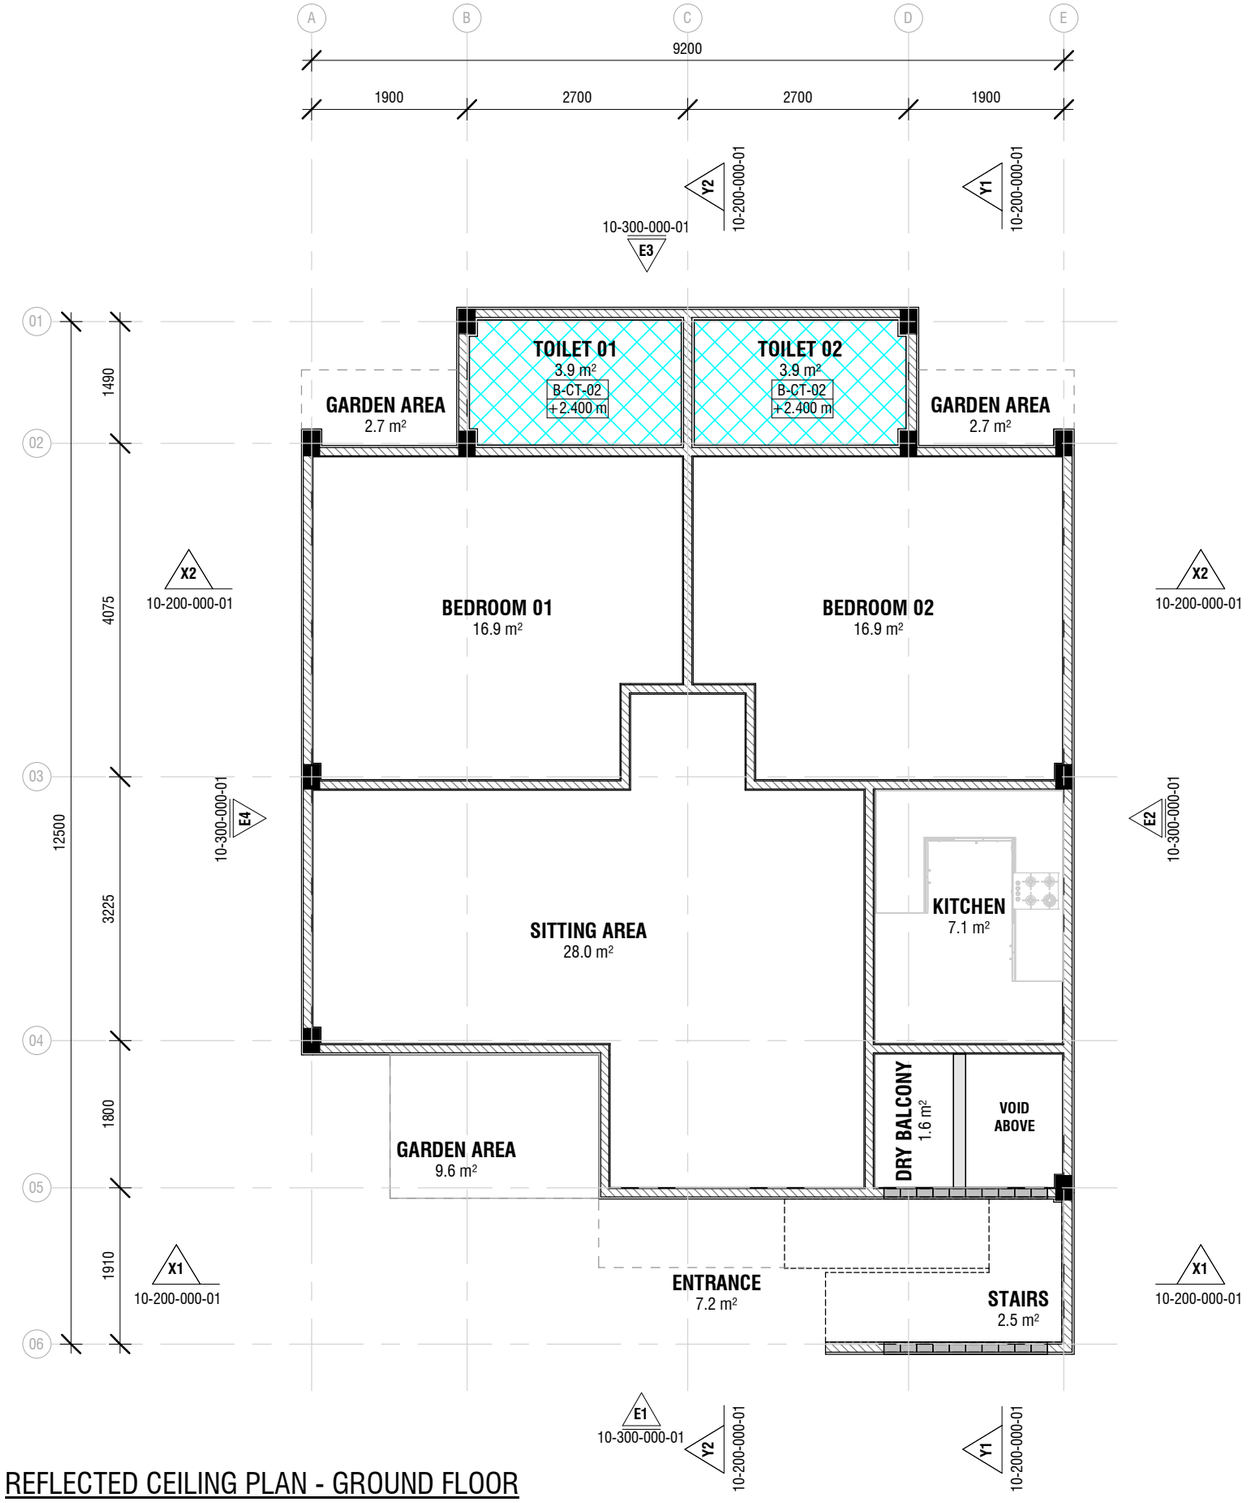

REFLECTED CEILING PLAN - GROUND FLOOR


1 : 75

LEGEND

CT-02 6MM THICK CEMENT BOARD C
ALUMINIUM FRAMING CHANNE
AND COMPLETE WITH SELECT

CT-XX — CEILING TYPE
X.XX m — CEILING LEVEL

NOTE: ANY UNIDENTIFIED AREAS TO HAVE EXPOSED SLAB SOFFIT (B-CF-C00) TO BE GROUND SMOOTH IN SELECT PAINT FINISH (ONE COAT OF PUTTY FOLLOWED BY SEALER AND 2 COATS OF PAINT)

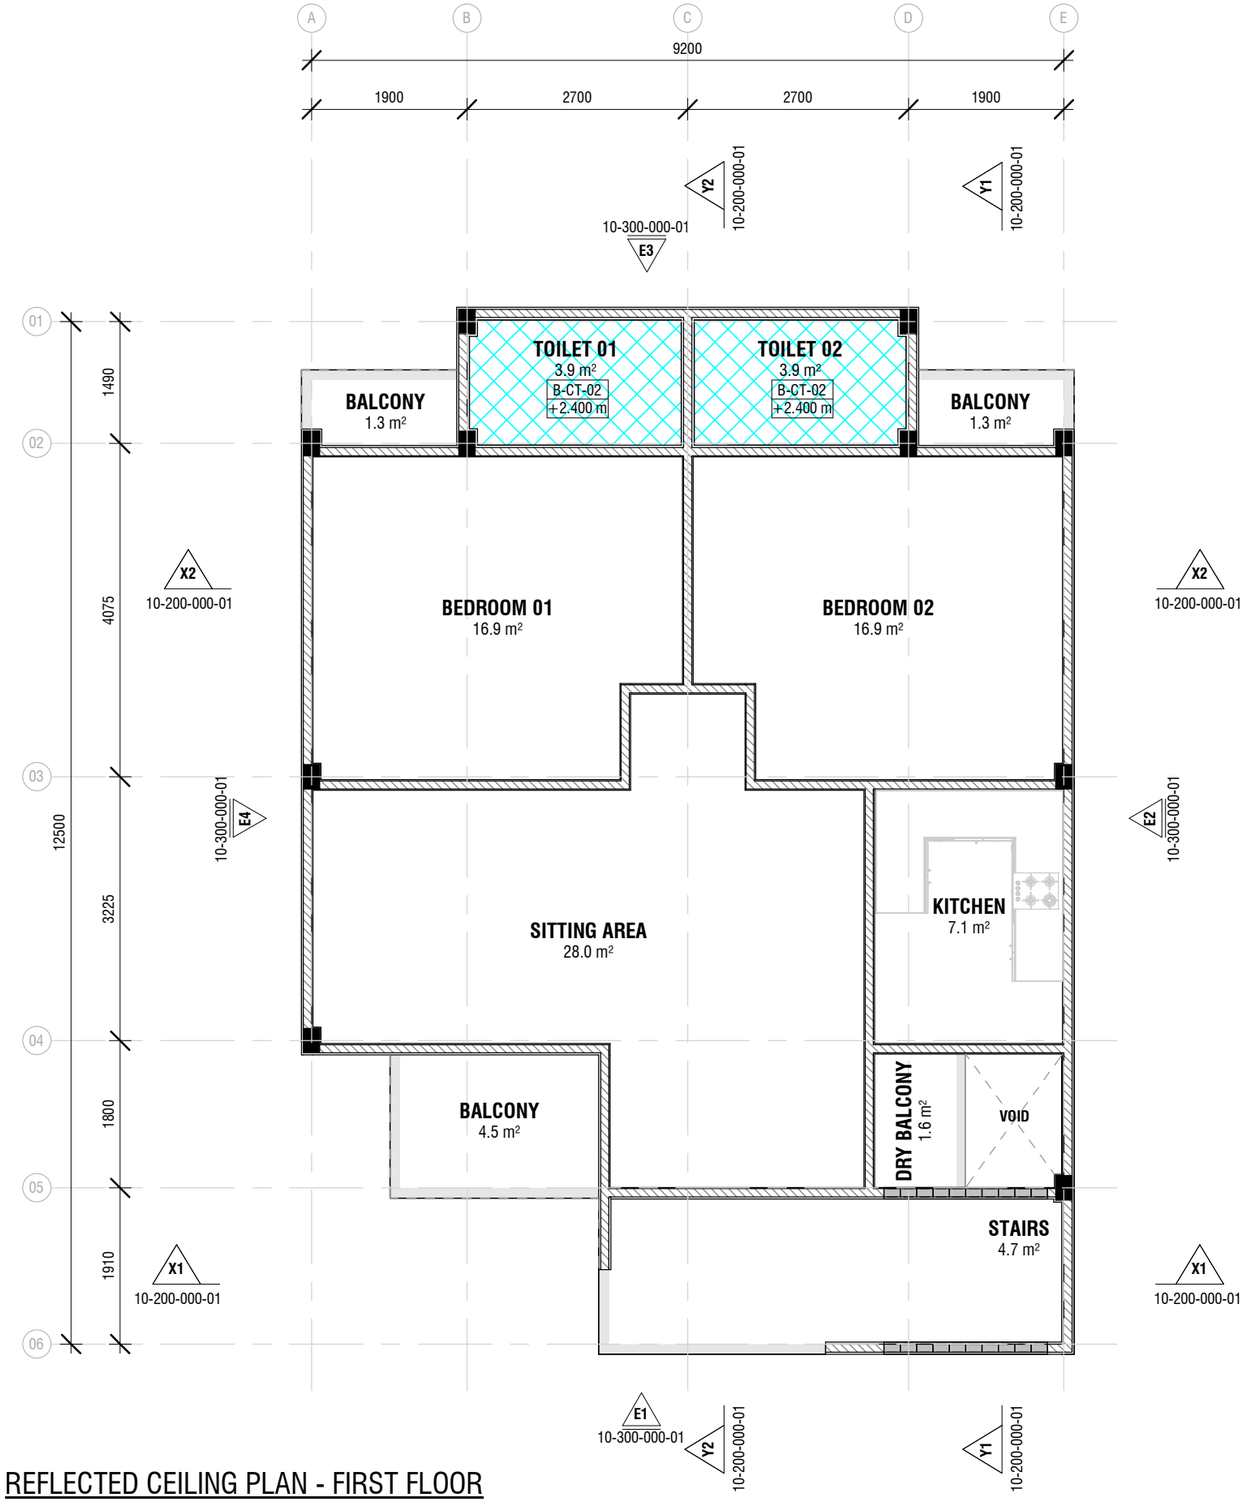

REFLECTED CEILING PLAN - FIRST FLOOR

1 : 75


LEGEND

CT-02 — 6MM THICK CEMENT BOARD C
ALUMINIUM FRAMING CHANNE
AND COMPLETE WITH SELECT

CT-XX
X.XX m

CEILING TYPE
CEILING LEVEL

NOTE: ANY UNIDENTIFIED AREAS TO HAVE EXPOSED SLAB SOFFIT (B-CF-C00) TO BE GROUND SMOOTH IN SELECT PAINT FINISH (ONE COAT OF PUTTY FOLLOWED BY SEALER AND 2 COATS OF PAINT)

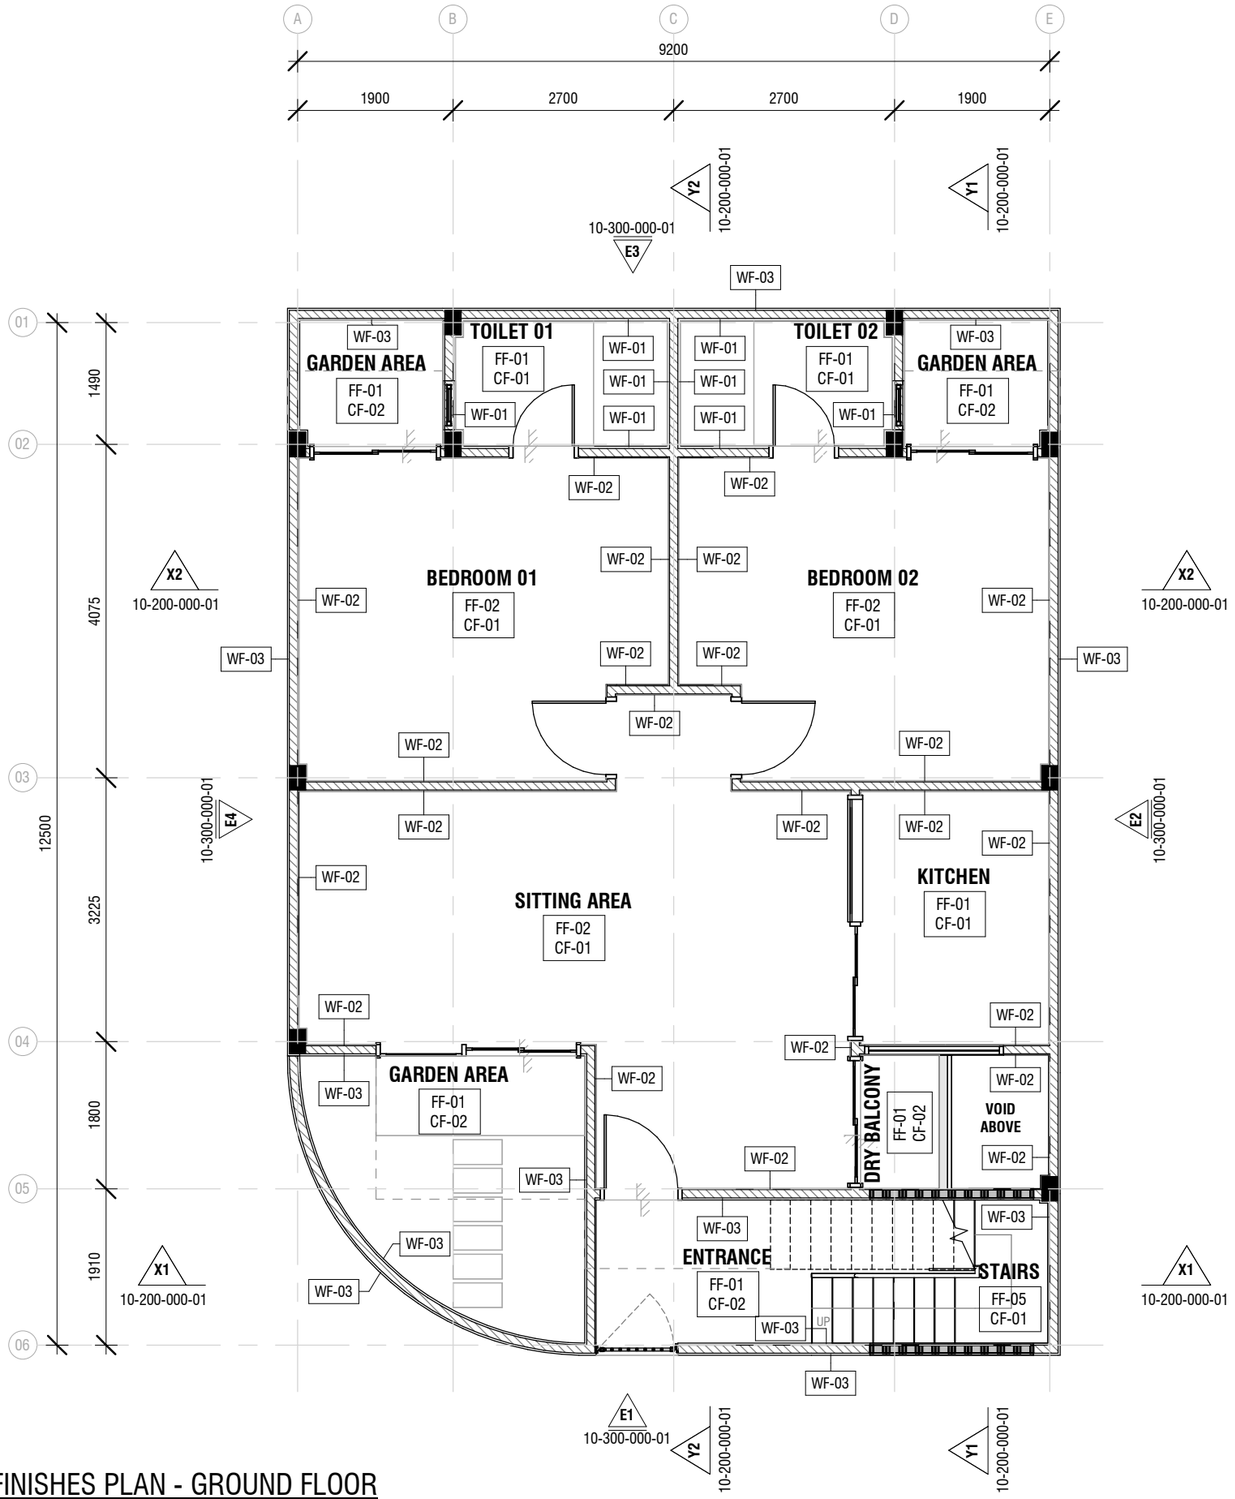


FINISHES PLAN - GROUND FLOOR

1 : 75

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENS
CEILING FINISH			
CF-01	INTERIOR CEILING PAINT	HEAVY METAL FREE FINISH - MATT FINISH	FAST DRYING, A PROPERTIES W ABROAD-SPEC AGAINST MOST MOULD
CF-02	EXTERIOR CEILING PAINT/ SLAB SOFFIT PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA LONGER PROTE AGAINST-COLO DUST, ALKALI,
CF-03	INSULATION CEILING PANEL	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH
FLOOR FINISH			
FF-01	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mr
FF-02	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mr
FF-03	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mr
FF-04	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mr
FF-05	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600m
FF-06	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600m
FF-07	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	1200mmX300m
FF-08	EPOXY PAINT FINSH	TWO COMPONENT EPOXY POLYAMIDE FLOOR FINISH 9-11 Sq.m/liter THICKNESS 60-70 MICRON	IDEAL ABRASIC RESISTANCE T CHEMICALS
FF-09	PLEXICUSHION FLOORING SYSTEM	PLEXIPAVE SHOCK ABSORBING PROPERTIES OF EPDM RUBBER CUSHIONING WITH SUBSURFACE SYSTEM MADE FROM SBR AND EPDM RUBBER GRANULES, COMPRESSED PLASTIC PARTICLES AND MINERAL FIBERS	PLEXICUSHION FEATURING 6 L CUSHION
FF-10	GYM FLOORING	HIGH SHOCK ABSORBTION AND SOUND INSULATION	500mmX500mr HIGH IMPACT R
FF-11	SELF LEVELING FLOORING	SELF LEVELING CEMENT FLOOR SCREEDING WITH BITUMINOUS WATERPROOFING AGENT	-
FF-12	INSULATION FLOOR	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH
FF-13	ARTIFICIAL TURFING	(NEED TO CONTACT WITH ID TEAM)	-
FF-14	PARKING FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-
FF-15	TERRACE FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-
WALL FINISH			
WF-01	PORCELAIN TILES	STRUCTURE - SMOOTH LAPPATO SURFACE LOOK - MATT FINISH	300mmX600mr
WF-02	INTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA ANTI-MOULD &
WF-03	EXTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA LONGER PROTE AGAINST-COLO DUST, ALKALI,
WF-04	INSULATION WALL	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH

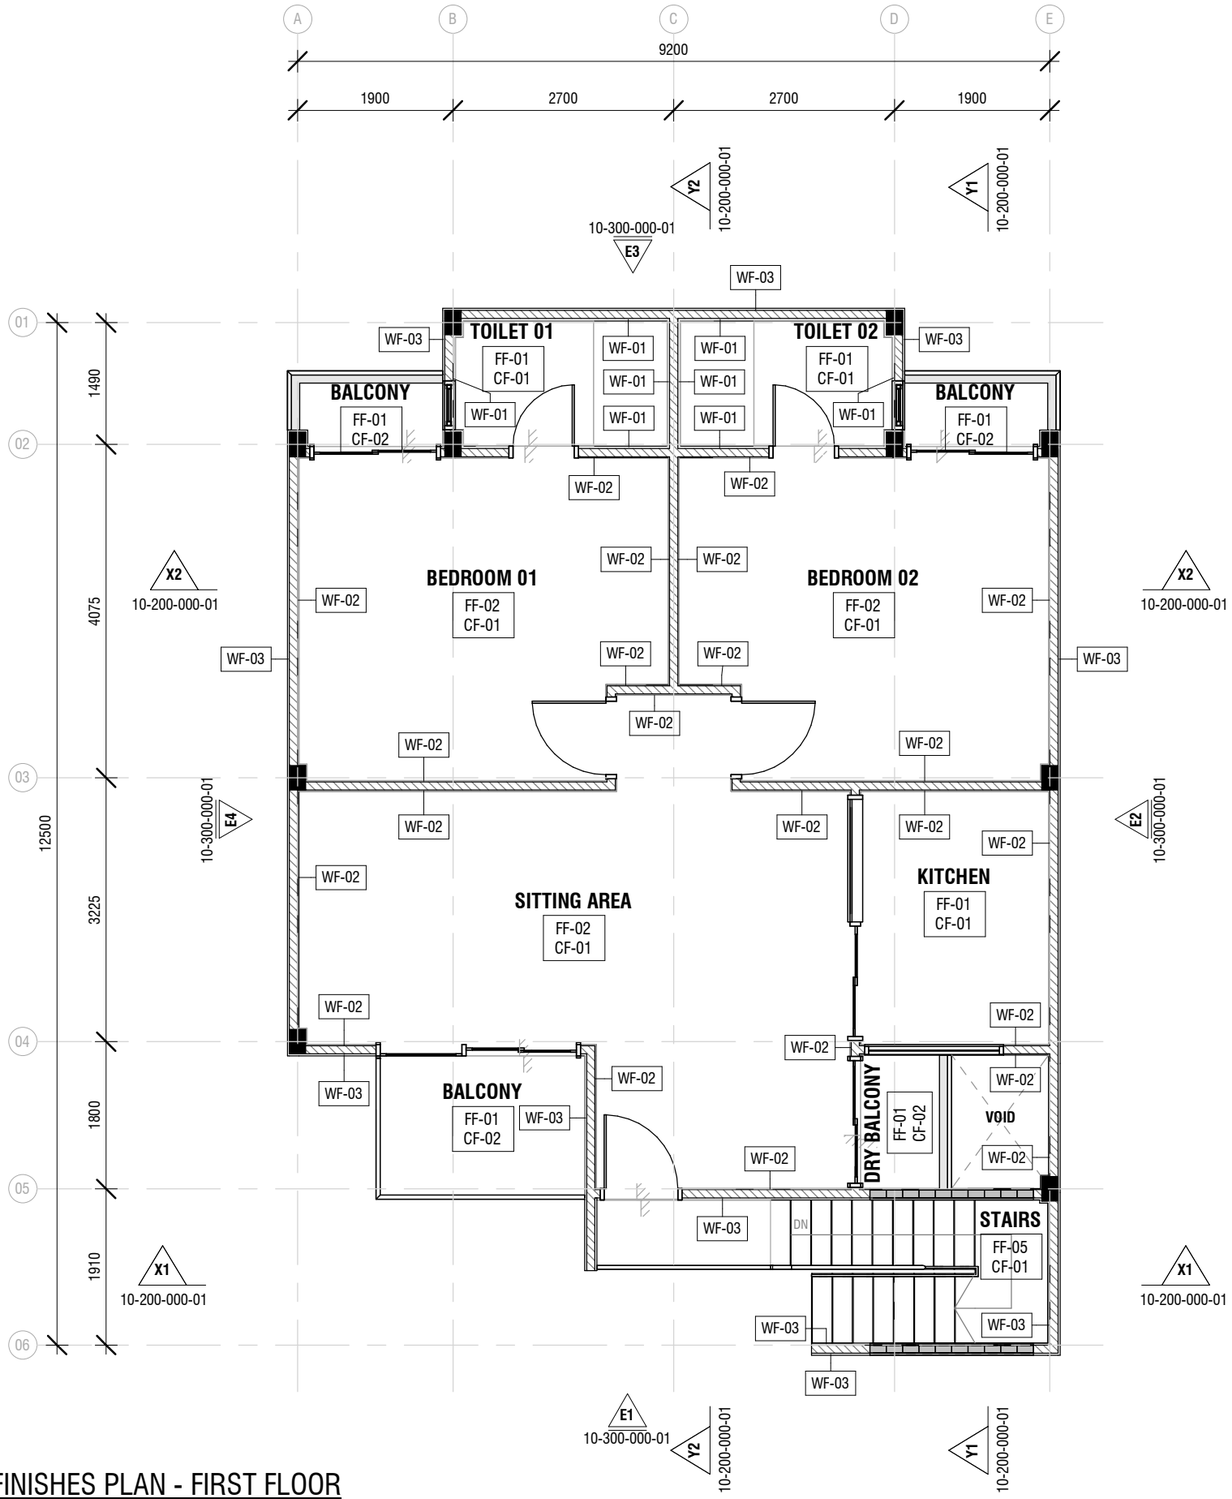

FINISHES PLAN - FIRST FLOOR


1 : 75

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENS
CEILING FINISH			
CF-01	INTERIOR CEILING PAINT	HEAVY METAL FREE FINISH - MATT FINISH	FAST DRYING, A PROPERTIES W ABROAD-SPEC AGAINST MOST MOULD
CF-02	EXTERIOR CEILING PAINT/ SLAB SOFFIT PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA LONGER PROTE AGAINST-COLO DUST, ALKALI,
CF-03	INSULATION CEILING PANEL	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH
FLOOR FINISH			
FF-01	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mr
FF-02	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mr
FF-03	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mr
FF-04	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mr
FF-05	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600m
FF-06	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600m
FF-07	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	1200mmX300m
FF-08	EPOXY PAINT FINSH	TWO COMPONENT EPOXY POLYAMIDE FLOOR FINISH 9-11 Sq.m/liter THICKNESS 60-70 MICRON	IDEAL ABRASIC RESISTANCE T CHEMICALS
FF-09	PLEXICUSHION FLOORING SYSTEM	PLEXIPAVE SHOCK ABSORBING PROPERTIES OF EPDM RUBBER CUSHIONING WITH SUBSURFACE SYSTEM MADE FROM SBR AND EPDM RUBBER GRANULES, COMPRESSED PLASTIC PARTICLES AND MINERAL FIBERS	PLEXICUSHION FEATURING 6 L CUSHION
FF-10	GYM FLOORING	HIGH SHOCK ABSORBTION AND SOUND INSULATION	500mmX500mr HIGH IMPACT R
FF-11	SELF LEVELING FLOORING	SELF LEVELING CEMENT FLOOR SCREEDING WITH BITUMINOUS WATERPROOFING AGENT	-
FF-12	INSULATION FLOOR	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH
FF-13	ARTIFICIAL TURFING	(NEED TO CONTACT WITH ID TEAM)	-
FF-14	PARKING FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-
FF-15	TERRACE FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-
WALL FINISH			
WF-01	PORCELAIN TILES	STRUCTURE - SMOOTH LAPPATO SURFACE LOOK - MATT FINISH	300mmX600mr
WF-02	INTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA ANTI-MOULD &
WF-03	EXTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EA LONGER PROTE AGAINST-COLO DUST, ALKALI,
WF-04	INSULATION WALL	PU SANDWICH INSULATION PANEL WITH STAINLESS STEEL SURFACE FINISH	100mm PU SAN INSULATION PA STAINLESS STE FINISH


*REFER TO STRUCTURAL DRAWING FOR STRU(

*STRUCTURAL DETAILS ARE TO BE CONFIRMEI

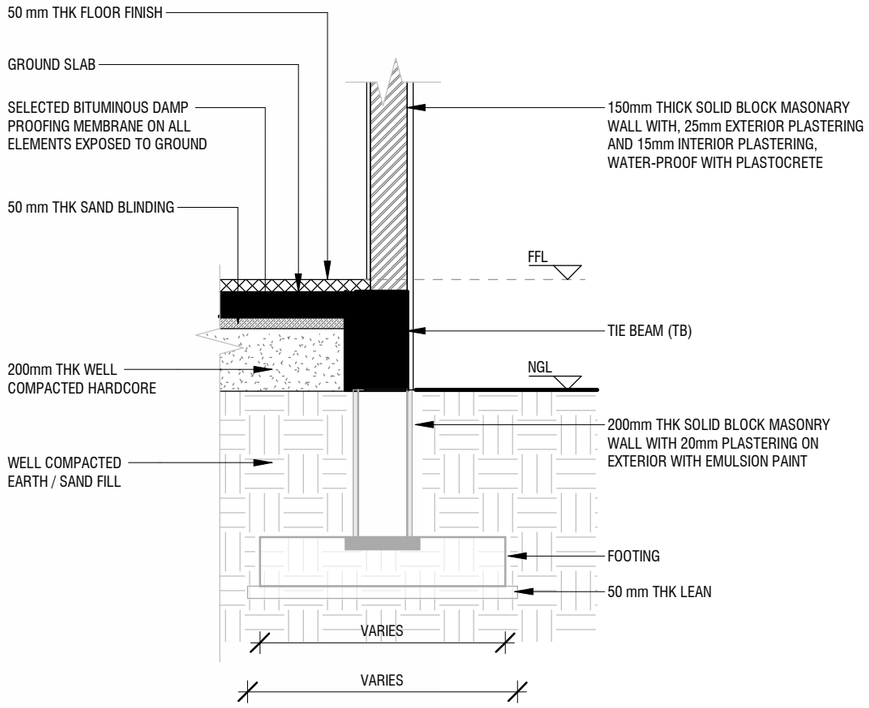


TYPICAL FLOOR TO WALL DETAIL

1 : 25

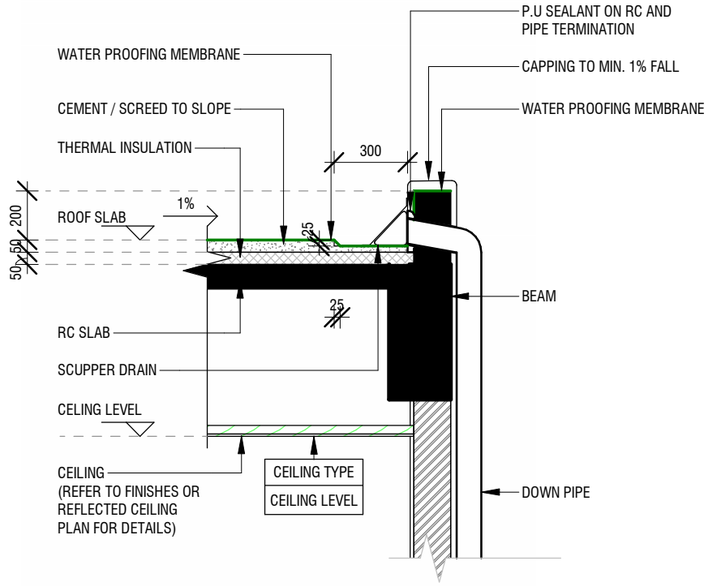


TYPICAL ROOF & SCUPPER DRAIN DETAIL

1 : 25

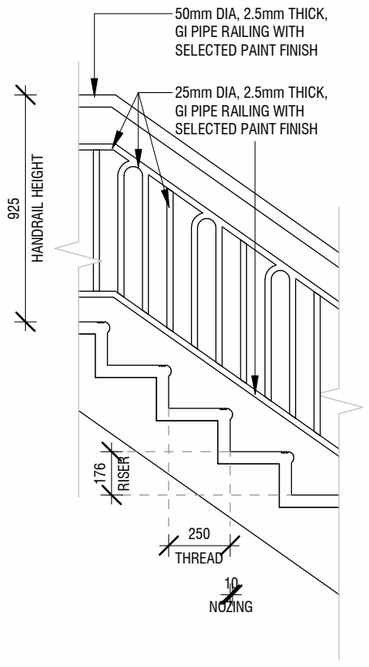


TYPICAL STAIR HANDRAIL DETAIL

1 : 25

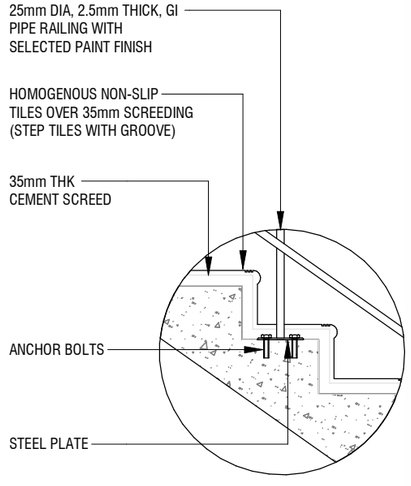

TYPICAL STAIRCASE STEP DETAIL

1 : 20

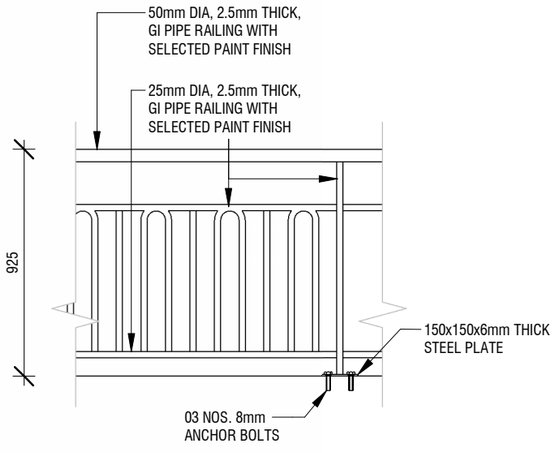

TYPICAL HANDRAIL DETAIL

1 : 25