LUXURIA MALDIVES

57- COFB- OFFICE BUILDING

LUXURIA HOTELS & RESORTS MALDIVES

ARCHITECTURAL DRAWINGS

The contents of these drawings remai

LIST OF DRAWINGS

SHEET NUMBER	SHEET NAME	SHEET ISSUE DATE	CURRENT REVISION	CURRENT REVISION DATE
00-GENERAL				
00-000-000-01	COVER PAGE	20/01/2026	00	20/01/2026
00-000-000-02	LIST OF DRAWINGS	20/01/2026	00	20/01/2026
00-000-000-03	LOCATION PLAN	20/01/2026	00	20/01/2026
05 - AREAS				
05-100-L00-01	AREA PLAN & SCHEDULE - GROUND FLOOR	20/01/2026	00	20/01/2026
05-100-L01-01	AREA PLAN & SCHEDULE - FIRST FLOOR	20/01/2026	00	20/01/2026
05-100-R01-01	AREA PLAN & SCHEDULE - ROOF SLAB	20/01/2026	00	20/01/2026
10 - GENERAL ARRANGEMENT				
10-100-L00-01	GROUND FLOOR PLAN	20/01/2026	00	20/01/2026
10-100-L01-01	FIRST FLOOR PLAN	20/01/2026	00	20/01/2026
10-100-R01-01	ROOF PLAN	20/01/2026	00	20/01/2026
10-200-000-01	SECTIONS	20/01/2026	00	20/01/2026
10-300-000-01	ELEVATIONS	20/01/2026	00	20/01/2026
10-500-000-01	3D VIEWS	20/01/2026	00	20/01/2026
19 - DOORS				
19-400-000-01	DOOR SCHEDULE & DETAILS	20/01/2026	00	20/01/2026
20 -WINDOWS				
20-400-000-01	WINDOW SCHEDULE & DETAILS	20/01/2026	00	20/01/2026
21 - CEILING				
21-100-L00-01	REFLECTED CEILING PLAN - GROUND FLOOR	20/01/2026	00	20/01/2026
21-100-L01-01	REFLECTED CEILING PLAN - FIRST FLOOR	20/01/2026	00	20/01/2026
23 - FINISHES				
23-100-L00-01	FINISHES PLAN - GROUND FLOOR	20/01/2026	00	20/01/2026
23-100-L01-01	FINISHES PLAN - FIRST FLOOR	20/01/2026	00	20/01/2026
24 - TYPICAL DETAILS				
24-600-000-01	TYPICAL DETAILS	20/01/2026	00	20/01/2026

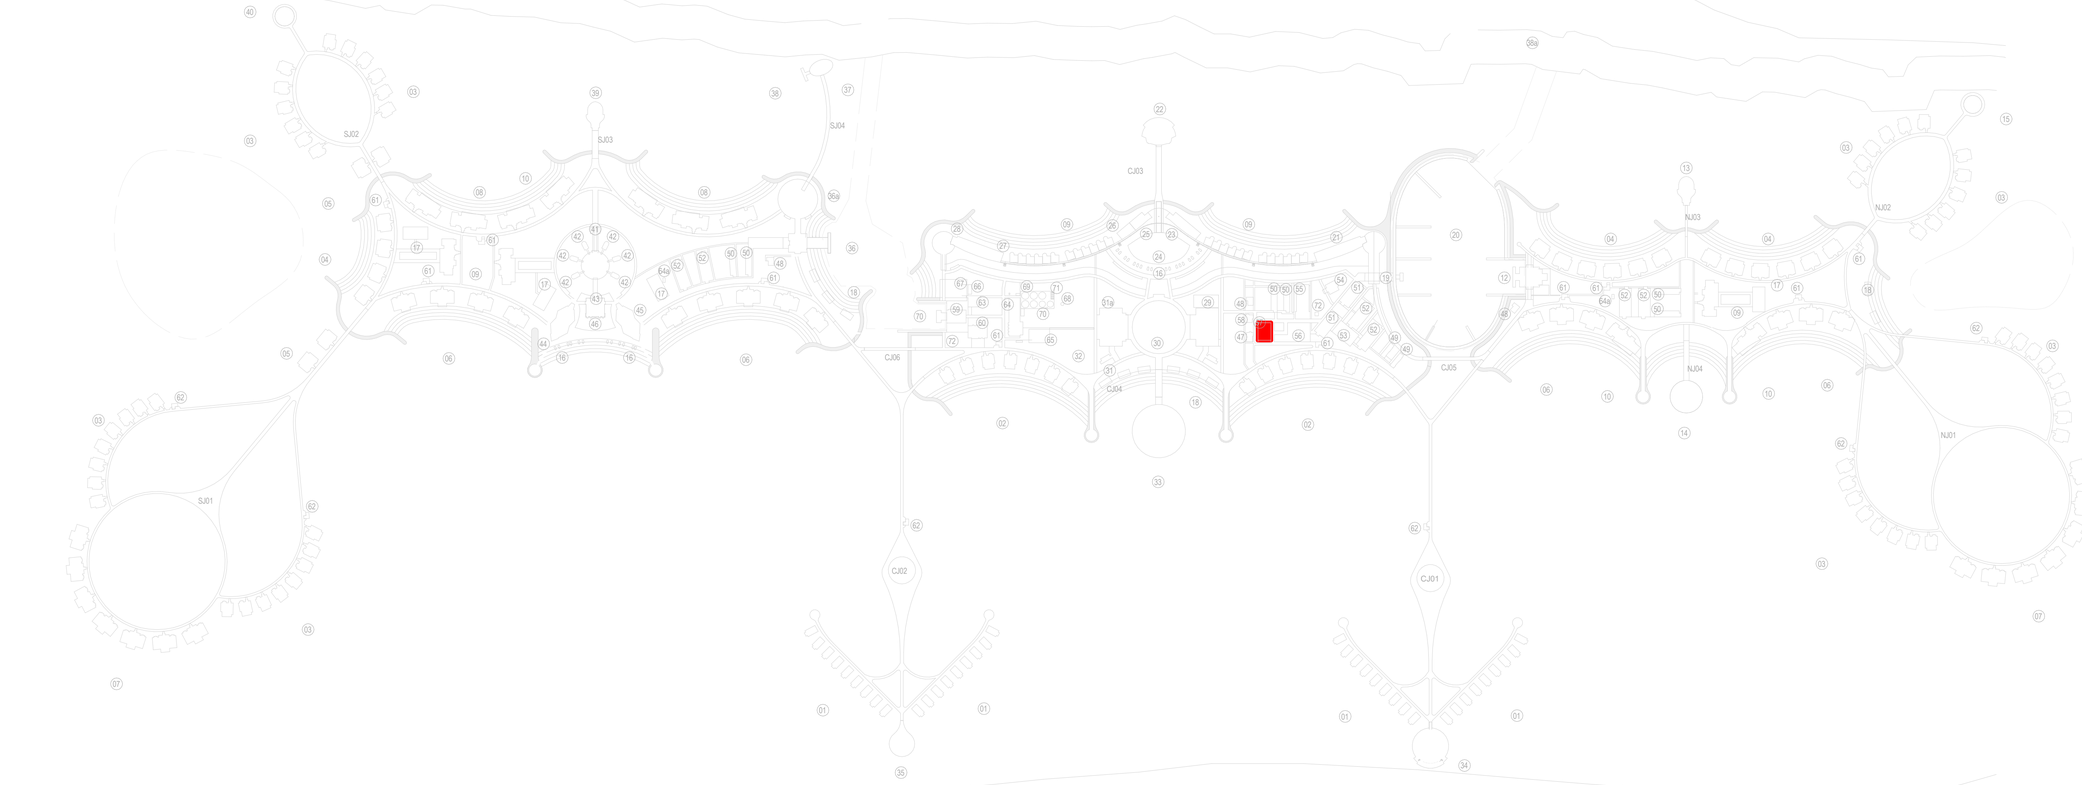

LOCATION PLAN

1 : 4500

AREA SCHEDULE - GROUND FLOOR

NAME	NUMBER	AREA
GROUND FLOOR LVL		
ENTRANCE	COFB-01	24.7 m²
RECEPTION	COFB-02	36.1 m²
HR SUPPORT	COFB-03	20.3 m²
CALL CENTER	COFB-04	18.7 m²
RESERVATIONS BAY	COFB-05	42.5 m²
LOBBY	COFB-06	7.1 m²
GM OFFICE	COFB-07	31.4 m²
PA TO GM	COFB-08	8.1 m²
TOILET	COFB-09	3.5 m²
MEP	COFB-10	3.3 m²
FILE STORAGE / AMENITIES	COFB-11	11.5 m²
PANTRY / GALLERY	COFB-12	12.0 m²
M TOILET	COFB-13	5.4 m²
F TOILET	COFB-14	5.4 m²
TRAINING / MEETING MULTI USE	COFB-15	40.4 m²
STORAGE / COPIER	COFB-16	13.9 m²
FINANCE TEAM	COFB-17	25.0 m²
FC OFFICER	COFB-18	14.3 m²
FIRE EXIT	COFB-19	4.9 m²
SALES MARKETING MANAGERS	COFB-20	22.2 m²
SALES DIR.	COFB-21	10.6 m²
RMS DIVISION DIR.	COFB-22	11.9 m²
HR MANAGER	COFB-23	11.9 m²
STORAGE	COFB-24	6.0 m²
INTERVIEW / TESTING	COFB-25	28.6 m²
STAIRS	COFB-26	7.5 m²
STAIRS	COFB-27	9.1 m²
RAMP	COFB-28	16.5 m²
RAMP	COFB-29	16.6 m²
STEPS	COFB-30	1.0 m²
STEPS	COFB-43	0.5 m²
TOTAL USABLE AREA		471.0 m²

57- COFB- OFFICE BUILDING

NO. OF UNITS	COVERED / MOT AREA PER UNIT (SQM)	OPEN AREA PER UNIT (SQM)	TOTAL BUA PER UNIT (SQM) (COVERED + OPEN AREA)	TOTAL BUA (NO. OF UNITS x TOTAL BUA PER UNIT)	TOTAL MOT AREA (SQM) (NO. OF UNITS x COVERED / MOT AREA PER UNIT)
1	460.4 m²	45.1 m²	505.5 m²	505.5 m²	460.4 m²

GROUND FLOOR PLAN

1 : 100

	TOTAL BUA PER UNIT	NO. OF UNITS	TOTAL BUA
GROUND FLOOR	505.5 m²	01	1169.6 m²
FIRST FLOOR	460.4 m²		
ROOF SLAB	203.7 m²		
TOTAL	1169.6 m²		

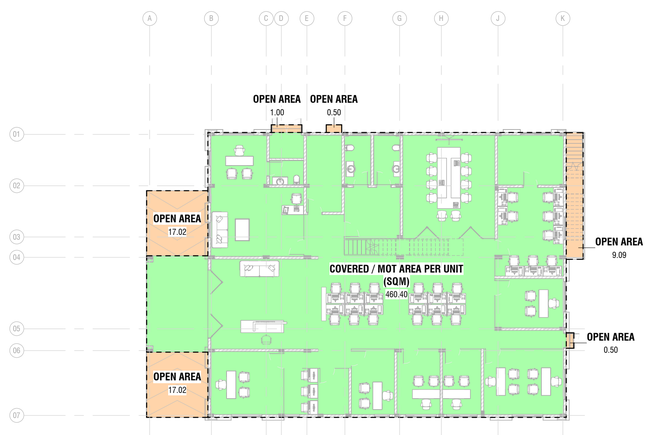

TOTAL BUA PER UNIT

1 : 200

AREA SCHEDULE - FIRST FLOOR

NAME	NUMBER	AREA
FIRST FLOOR LVL		
LOUNGE	COFB-31	33.2 m²
SECURITY OFFICERS	COFB-32	26.2 m²
HOLDING ROOM	COFB-33	15.0 m²
CCTV+FIRE CONTROL	COFB-34	23.2 m²
CSO OFFICE	COFB-35	11.8 m²
DATA CENTER	COFB-36	19.4 m²
IT OFFICE	COFB-37	27.9 m²
FIRE EXIT	COFB-38	5.4 m²
FIRST FLOOR ROOF SLAB	COFB-39	232.8 m²
ENTRANCE ROOF SLAB	COFB-40	22.7 m²
MEP	COFB-46	3.3 m²
TOTAL USABLE AREA		420.8 m²

AREA PLAN & SCHEDULE - FIRST FLOOR

1 : 100

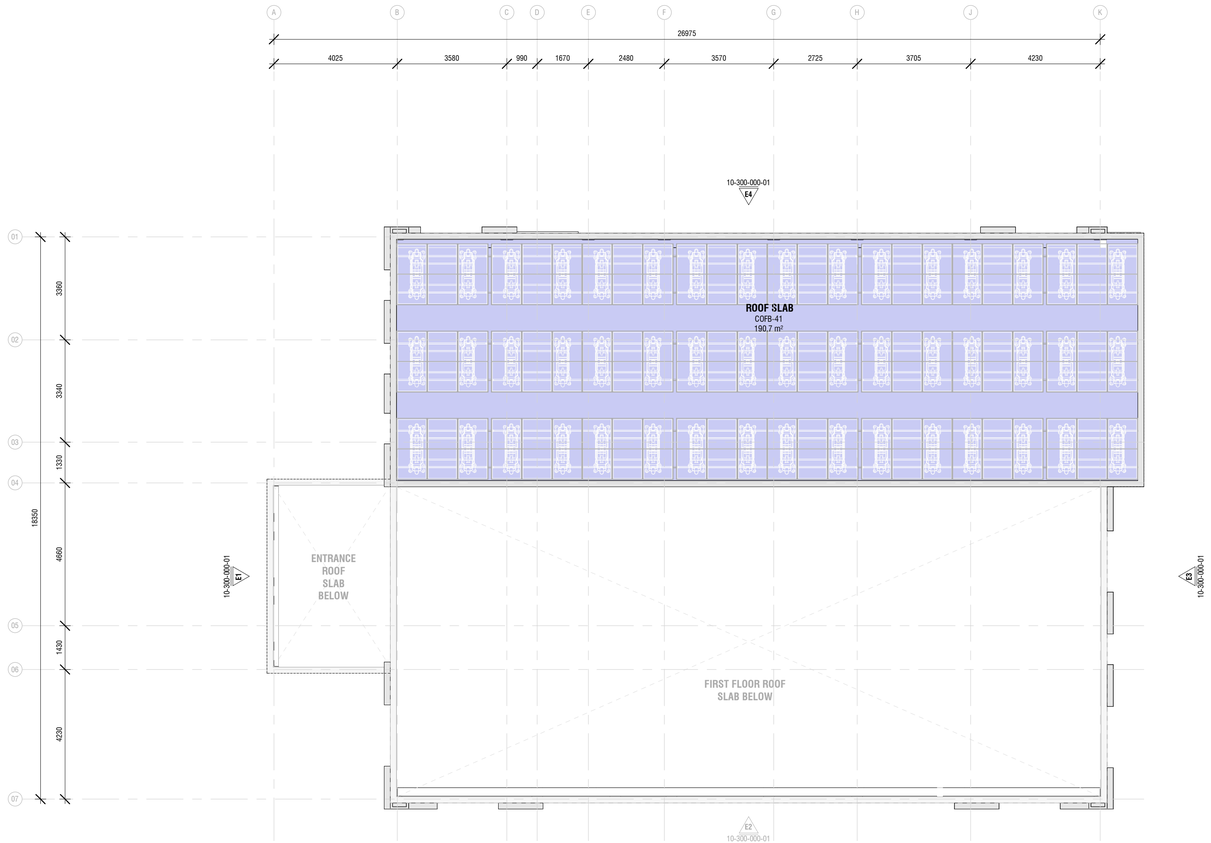

AREA SCHEDULE - ROOF

NAME	NUMBER	AREA
ROOF APEX LVL		
ROOF SLAB	COFB-41	190.7 m²
TOTAL USABLE AREA		190.7 m²

AREA PLAN & SCHEDULE - ROOF PLAN

1 : 100

WALL LEGEND

150mm THICK SOLID BLOCK MASONRY WALL

100mm THICK SOLID BLOCK MASONRY WALL

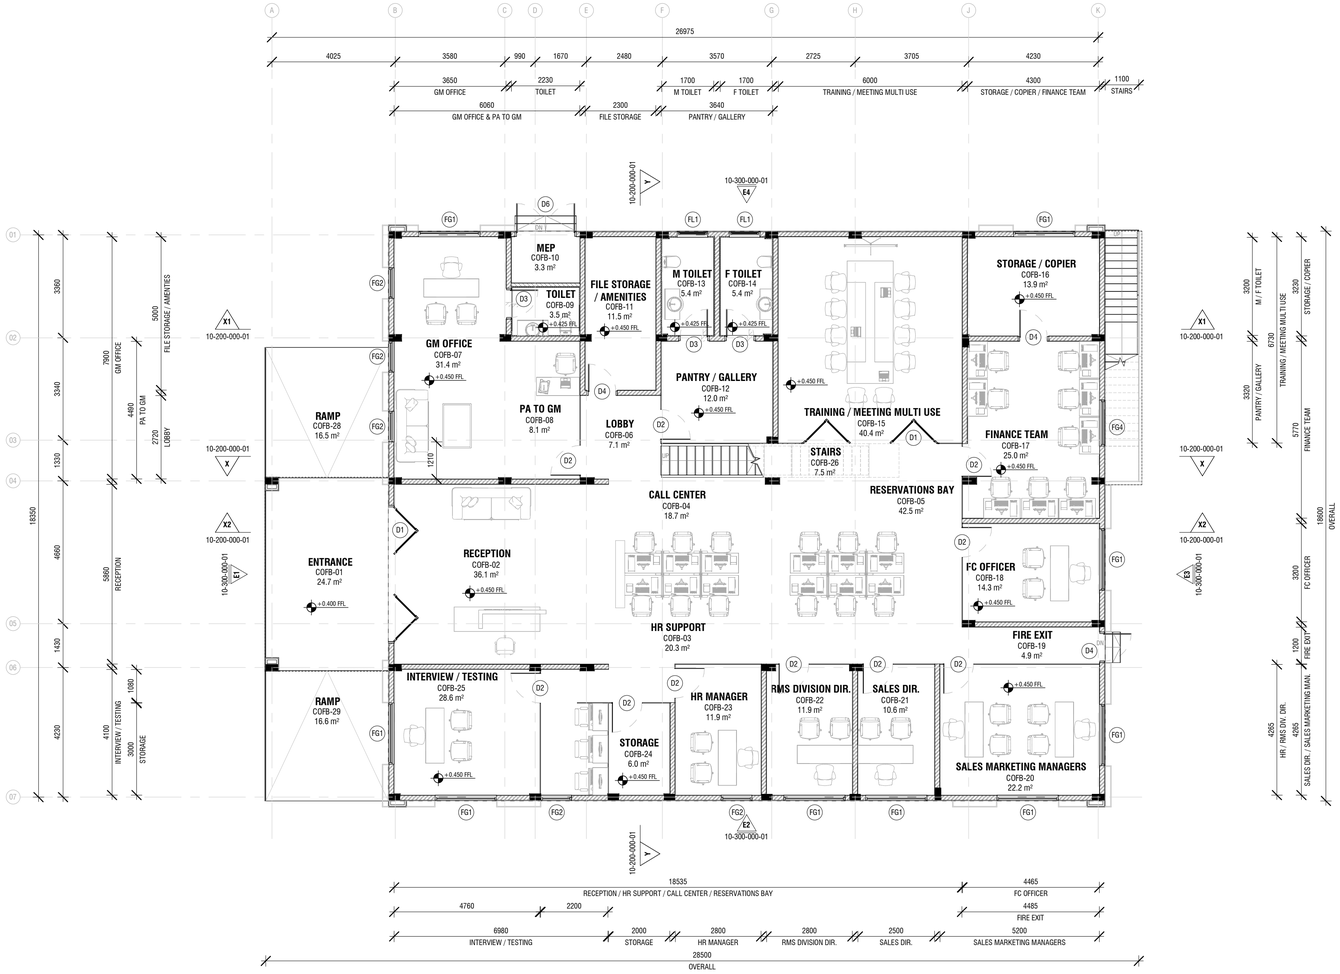

GROUND FLOOR PLAN

1 : 100

WALL LEGEND

150mm THICK SOLID BLOCK MASONRY WALL

100mm THICK SOLID BLOCK MASONRY WALL

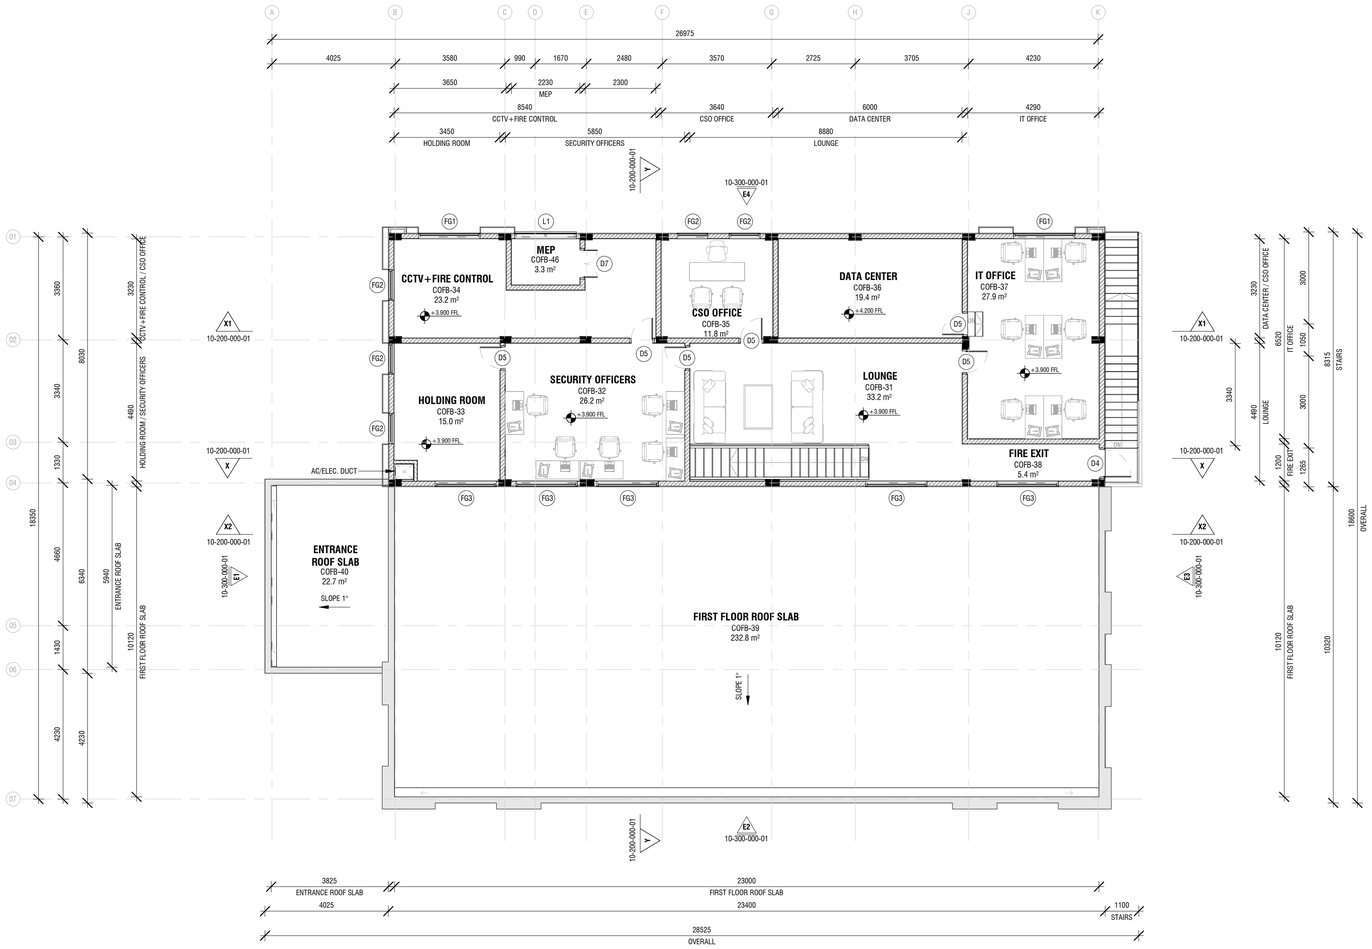

FIRST FLOOR PLAN

1 : 100

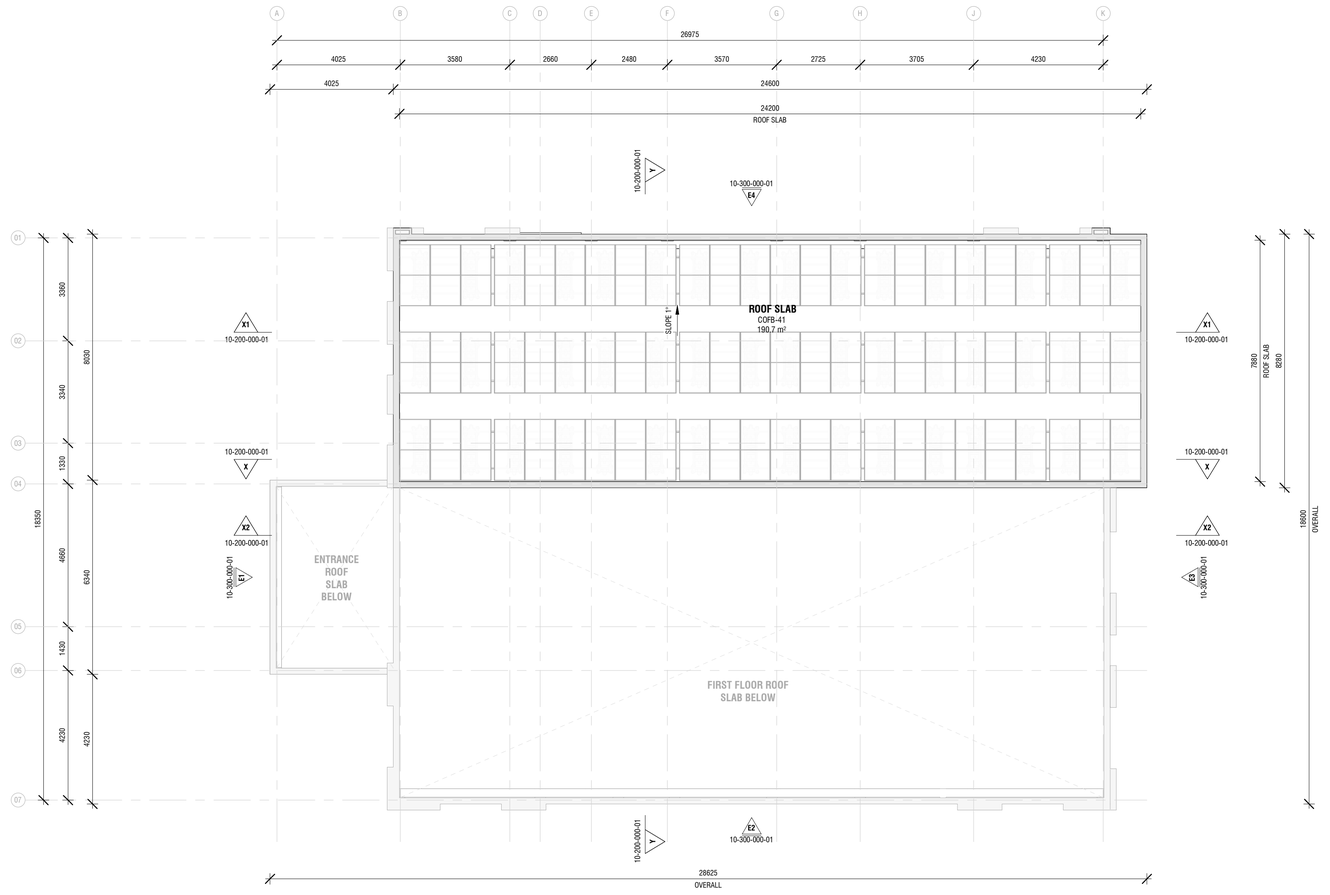

ROOF PLAN

1 : 100

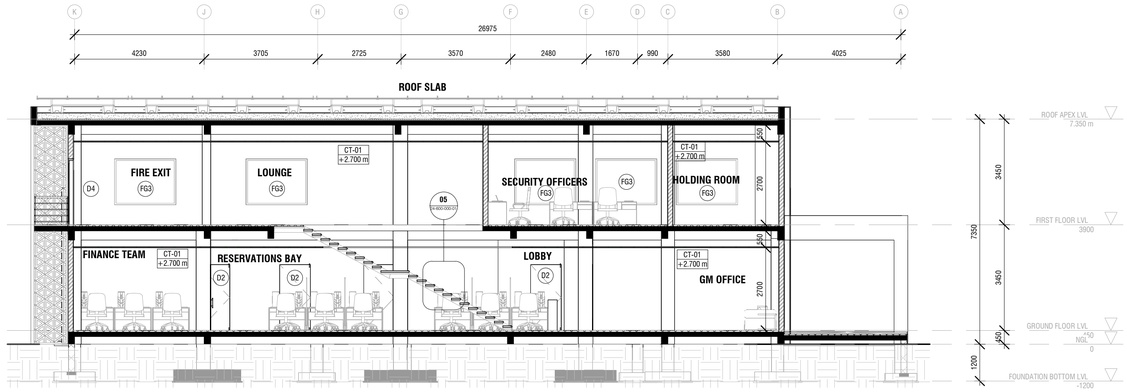

SECTION X
1 : 100

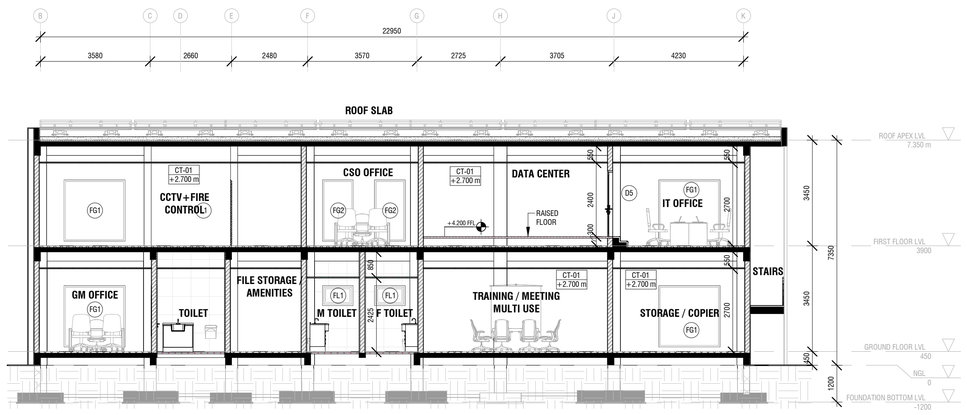

SECTION X1
1 : 100

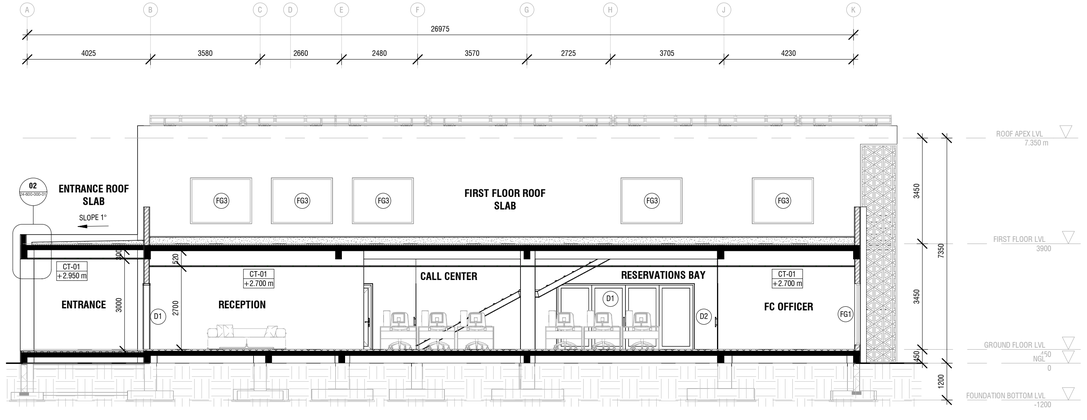

SECTION X2
1 : 100

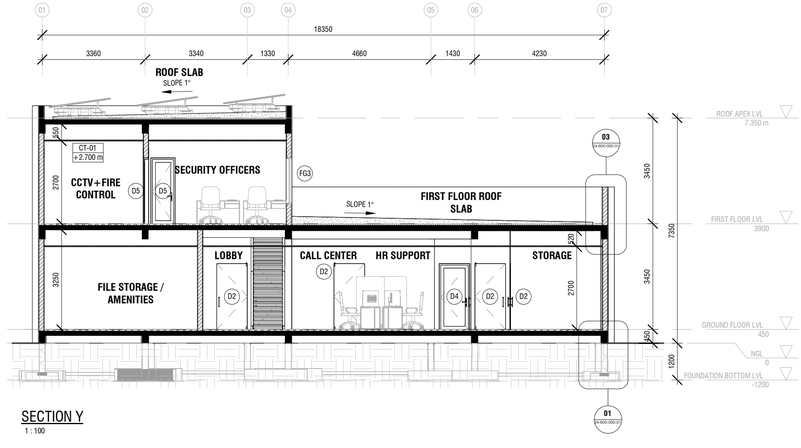

SECTION Y
1 : 100

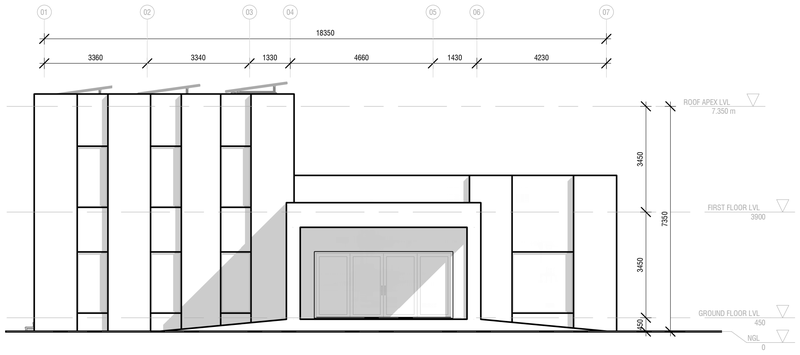

ELEVATION 01

1 : 100

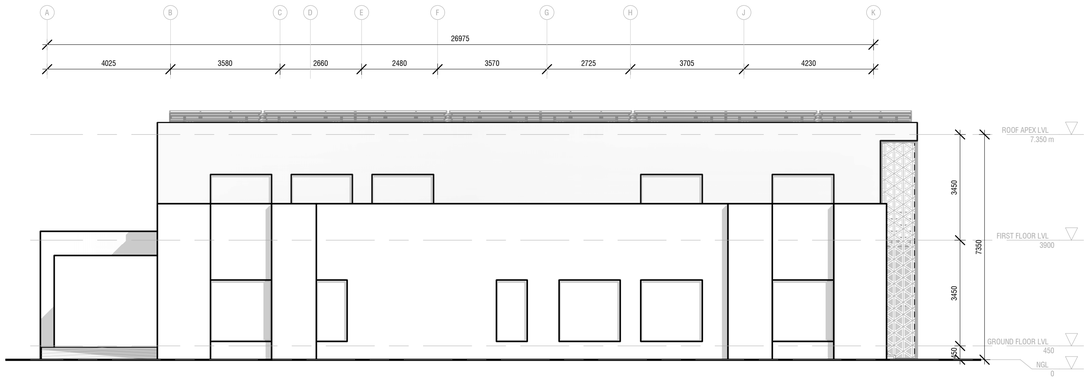

ELEVATION 02

1 : 100

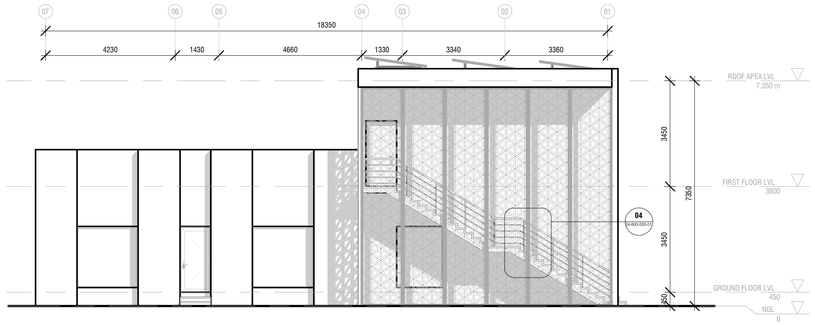

ELEVATION 03

1 : 100

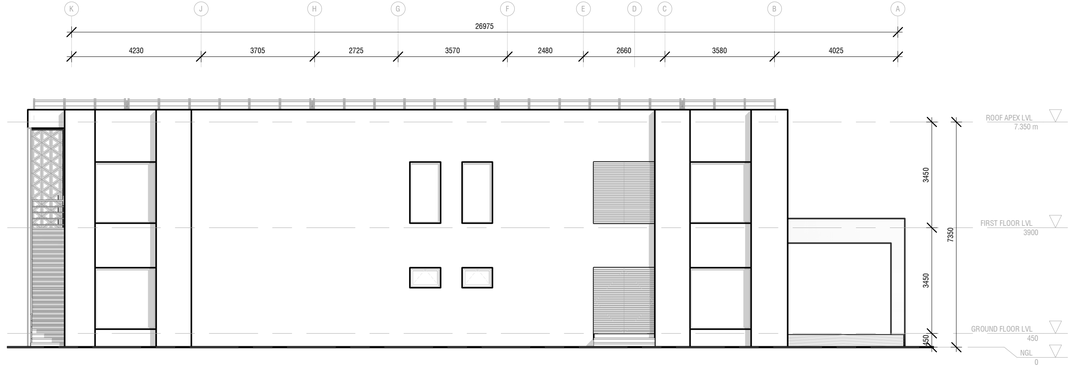

ELEVATION 04

1 : 100

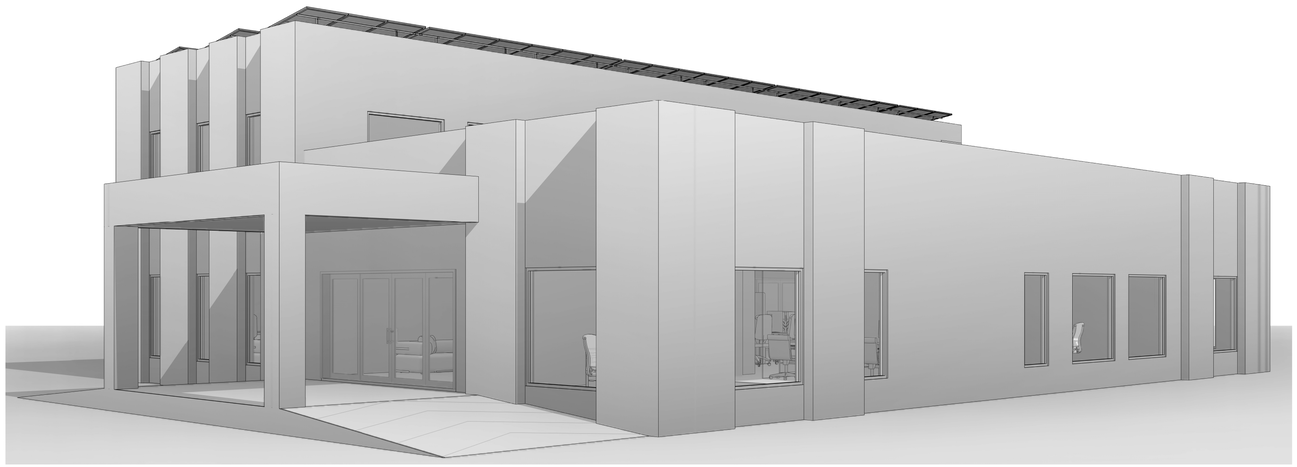

3D VIEW 01

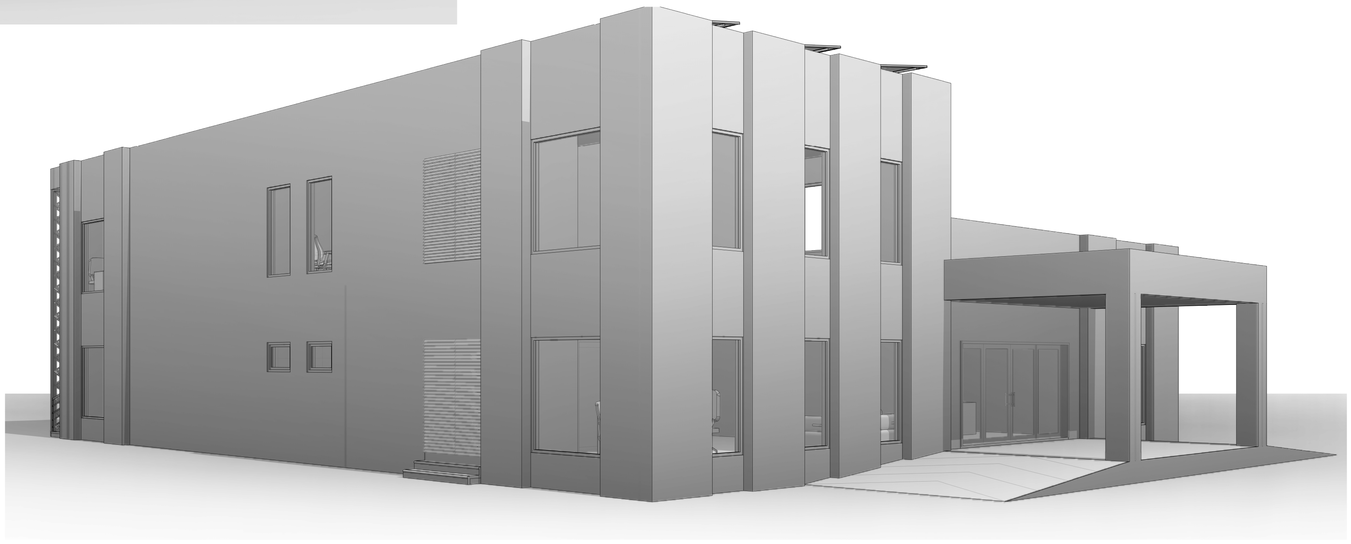

3D VIEW 02

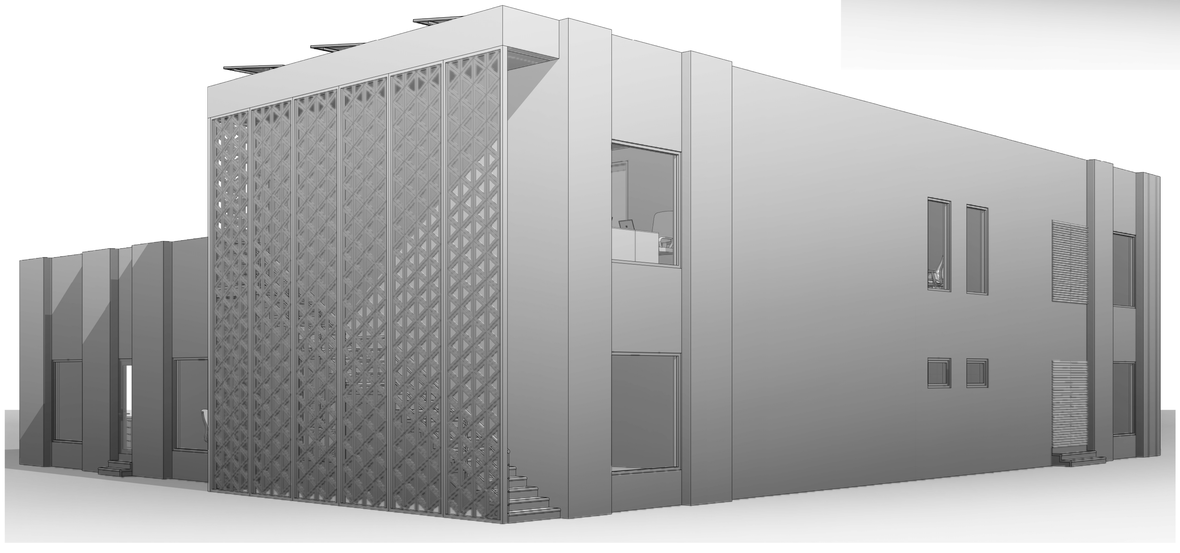

3D VIEW 03

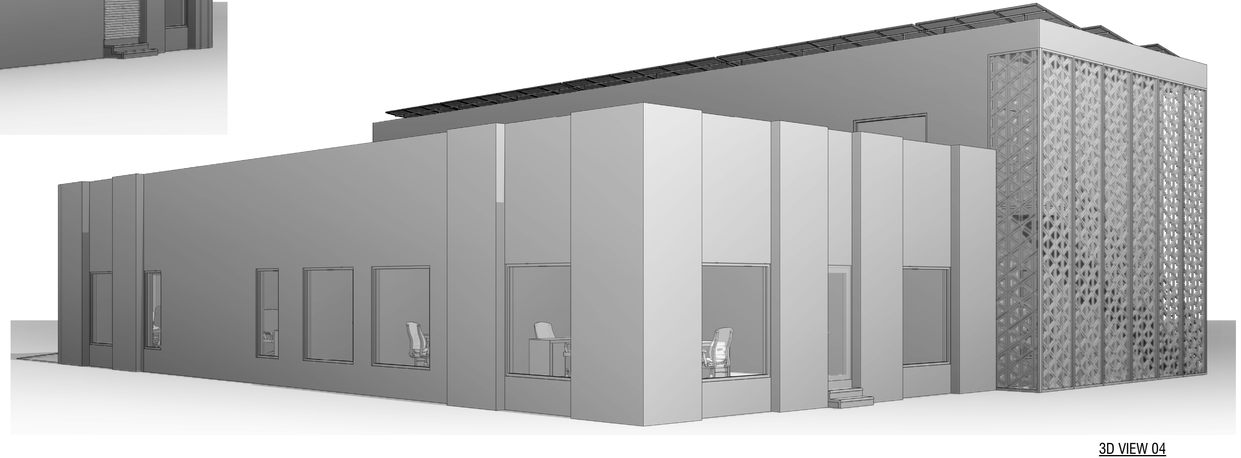

3D VIEW 04

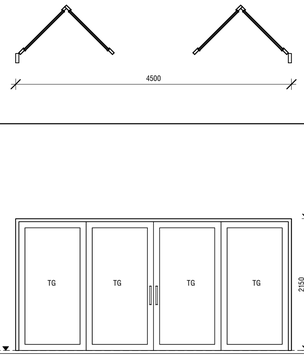

GENERAL	LOCATION	COFB - RECEPTION, TRAINING / MEETING MULTI USE		
	TAG	D1		
	WALL OPENING DIM.	4500x2150mm (W x H)	TYPE	4 PANEL FOLDING DOOR
	QUANTITY	02 NOS.	OPEN AREA	9.68 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

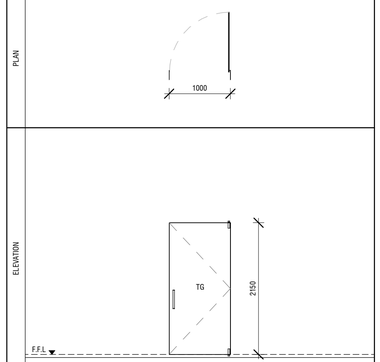

GENERAL	LOCATION	COFB - GM OFFICE, PANTRY / GALLERY, FINANCE TEAM, FC OFFICE, SALES MARKETING MANAGERS, SALES DIR., RMS DIVISION DIR., HR MANAGER, STORAGE, INTERVIEW / TESTING		
	TAG	D2		
	WALL OPENING DIM.	1000x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	10 NOS.	OPEN AREA	2.15 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

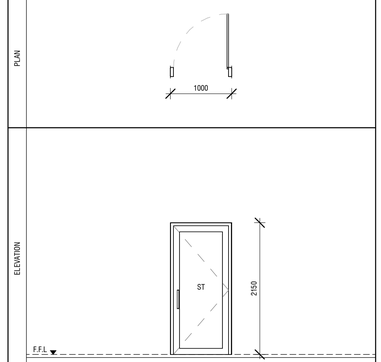

GENERAL	LOCATION	COFB - TOILET, M TOILET, F TOILET		
	TAG	D3		
	WALL OPENING DIM.	1000x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	03 NOS.	OPEN AREA	2.15 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

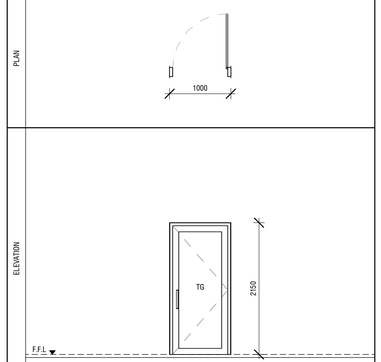

GENERAL	LOCATION	COFB - FILE STORAGE / AMENTIES, FIRE EXIT		
	TAG	D4		
	WALL OPENING DIM.	1000x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	04 NOS.	OPEN AREA	2.15 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

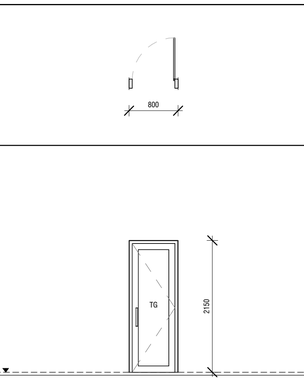

GENERAL	LOCATION	COFB - SECURITY OFFICERS, HOLDING ROOM, CCTV+FIRE CONTROL, CSO OFFICE, DATA CENTER, IT OFFICE		
	TAG	D5		
	WALL OPENING DIM.	800x2150mm (W x H)	TYPE	1 PANEL SWING DOOR
	QUANTITY	06 NOS.	OPEN AREA	1.72 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

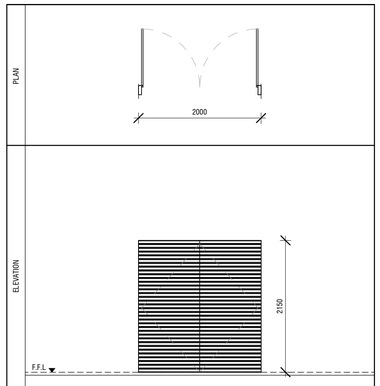

GENERAL	LOCATION	COFB - MEP		
	TAG	D6		
	WALL OPENING DIM.	2000x2150mm (W x H)	TYPE	2 PANEL SWING DOOR
	QUANTITY	01 NOS.	OPEN AREA	4.3 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

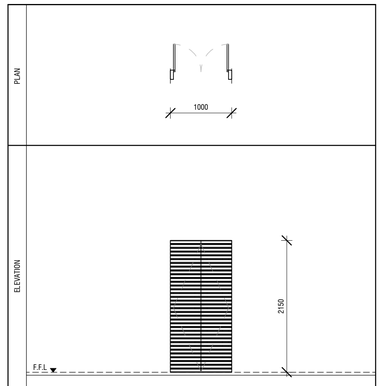

GENERAL	LOCATION	COFB - MEP		
	TAG	D7		
	WALL OPENING DIM.	1000x2150mm (W x H)	TYPE	2 PANEL SWING DOOR
	QUANTITY	01 NOS.	OPEN AREA	2.15 Sqm
FRAME	FRAME SIZE	50x150mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
DOOR PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK SET			
	DOOR VIEWER			
	DOOR CLOSER			
	SOFT CLOSING			
	FLUSH BOLTS			
	DOOR STOPPER			
	RUBBER SEAL			
	KICK PLATE			
	ACCESS CONTROL			

DOOR SCHEDULE

1 : 50

LEGEND

CG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL

NOTE

- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PLANS.
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (LB) ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)

DOOR SCHEDULE

No.	DESCRIPTION	WIDTH	HEIGHT	QTY
D1	2 Panel Swing Door - Glass Panel - Aluminum Frame	4500	2150	2
D2	1 Panel Swing Door - Frosted Glass Panel - Frameless	1000	2150	10
D3	1 Panel Swing Door - Solid Timber Panel - Solid Timber Frame	1000	2150	3
D4	1 Panel Swing Door - Tempered Glass - Solid Timber Frame	1000	2150	4
D5	1 Panel Swing Door - Solid Timber Panel - Solid Timber Frame	800	2150	6
D6	2 Panel Swing Door - Louver Panel - Aluminum Frame	2000	2150	1
D7	2 Panel Swing Door - Louver Panel - Aluminum Frame	1000	2150	1

PLAN



ELEVATION



GENERAL	LOCATION	COFB - GM OFFICE, STORAGE / COPIER, FC OFFICE, SALES MARKETING MANAGERS, SALES DIR. , RMS DIVISION DIR. , INTERVIEW / TESTING, CCTV+FIRE CONTROL, IT OFFICE		
	TAG	FG1		
	WALL OPENING DIM.	2000x2000mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	11 NOS.	OPEN AREA	4.00 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

PLAN

ELEVATION

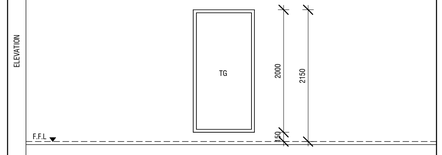

GENERAL	LOCATION	COFB - GM OFFICE, HR MANAGER, TESTING, CCTV+FIRE CONTROL, CSO OFFICE, HOLDING ROOM		
	TAG	FG2		
	WALL OPENING DIM.	1000x2000mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	10 NOS.	OPEN AREA	2.00 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

PLAN

ELEVATION

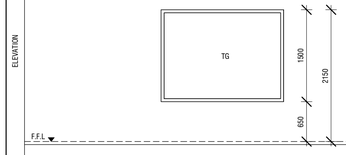

GENERAL	LOCATION	COFB - FIRE EXIT, LOUNGE, SECURITY OFFICERS, HOLDING ROOM		
	TAG	FG3		
	WALL OPENING DIM.	2000x1500mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	05 NOS.	OPEN AREA	3.00 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

PLAN



ELEVATION

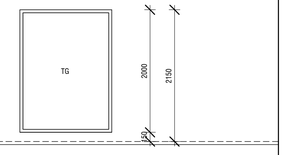

GENERAL	LOCATION	COFB - FINANCE TEAM		
	TAG	FG4		
	WALL OPENING DIM.	1500x2000mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	01 NOS.	OPEN AREA	3.00 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

LEGEND

CG - CLEAR GLASS
FTG - FIXED CLEAR GLASS
FG - FROSTED GLASS
FFG - FIXED FROSTED GLASS
RG - REFLECTED GLASS
FRG - FIXED REFLECTED GLASS
TG - TEMPERED CLEAR GLASS
AL - ALUMINUM LOUVERS
ST - SOLID TIMBER
T - TIMBER
PVC - POLYVINYL CHLORIDE
GS - GALVANIZED STEEL

NOTE

- ALL DOORS & WINDOWS TO BE CHECKED ON SITE BEFORE FABRICATION.
- ALL DOOR & WINDOWS VIEWED FROM EXTERIOR, FOR DOOR SWING, REFER TO FLOOR PLANS.
- INTERNAL DOORS FRAME DEPTH TO BE WIDTH OF THE WALL.
- THE DOORS / WINDOWS WHICH DO NOT TOUCH THE BEAM SHALL HAVE A LINTEL BEAM (LB) ABOVE THE DOOR / WINDOW.
- FOR ALL THE WINDOWS PUT A SILL BEAM BELOW THE WINDOW (SB)

WINDOW SCHEDULE

NO	DESCRIPTION	WIDTH	HEIGHT	QTY
FG1	1 Panel Window - Fixed Glass - Aluminum Frame	2000	2000	11
FG2	1 Panel Window - Fixed Glass - Aluminum Frame	1000	2000	10
FG3	1 Panel Window - Fixed Glass - Aluminum Frame	2000	1500	5
FG4	1 Panel Window - Fixed Glass - Aluminum Frame	1500	2000	1
FL1	1 Panel Window - Top Hung - Aluminum Frame	1000	650	2
L1	2 Panel Fixed Louver - Aluminum Frame	2000	2000	1

PLAN

ELEVATION



GENERAL	LOCATION	COFB - M TOILET, F TOILET		
	TAG	FL1		
	WALL OPENING DIM.	1000x650mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	02 NOS.	OPEN AREA	0.65 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

PLAN

ELEVATION

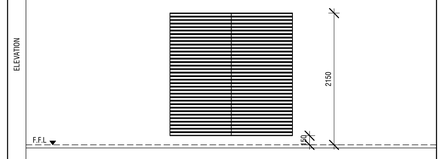

GENERAL	LOCATION	COFB - ELECT.		
	TAG	L1		
	WALL OPENING DIM.	1000x2000mm (W x H)	TYPE	BY ID CONSULTANT
	QUANTITY	01 NOS.	OPEN AREA	2.0 Sqm
FRAME	FRAME SIZE	50x100mm	MATERIAL	BY ID CONSULTANT
	FINISH	BY ID CONSULTANT		
WINDOW PANEL	MATERIAL			
	FINISH			
	GLAZING			
	FIRE RATING			
	ACOUSTIC RATING			
IRONMONGERY	HINGES/ SLIDING GEAR			
	HANDLE			
	LOCK			
	FLUSH BOLTS			
	SHADING CANOPY			

WINDOW SCHEDULE

1 : 50

LEGEND

CT-01		9MM THICK MOISTURE RESISTANT GYPSUM CEILING WITH ALUMINIUM FRAMING CHANNELS. GROUND SMOOTH AND COMPLETE WITH SELECTED PAINT FINISH.
CT-02		6MM THICK CEMENT BOARD CEILING WITH ALUMINIUM FRAMING CHANNEL. GROUND SMOOTH AND COMPLETE WITH SELECTED PAINT FINISH.

CT-XX — CEILING TYPE
X.XX m — CEILING LEVEL

NOTE: ANY UNIDENTIFIED AREAS TO HAVE EXPOSED SLAB SOFFIT (B-CF-C00) TO BE GROUND SMOOTH IN SELECT PAINT FINISH (ONE COAT OF PUTTY FOLLOWED BY SEALER AND 2 COATS OF PAINT)

REFLECTED CEILING PLAN - GROUND FLOOR

1 : 100

LEGEND

CT-01		9MM THICK MOISTURE RESISTANT GYPSUM CEILING WITH ALUMINIUM FRAMING CHANNELS. GROUND SMOOTH AND COMPLETE WITH SELECTED PAINT FINISH.
CT-02		6MM THICK CEMENT BOARD CEILING WITH ALUMINIUM FRAMING CHANNEL. GROUND SMOOTH AND COMPLETE WITH SELECTED PAINT FINISH.

CT-XX — CEILING TYPE
X.XX m — CEILING LEVEL

NOTE: ANY UNIDENTIFIED AREAS TO HAVE EXPOSED SLAB SOFFIT (B-CF-C00) TO BE GROUND SMOOTH IN SELECT PAINT FINISH (ONE COAT OF PUTTY FOLLOWED BY SEALER AND 2 COATS OF PAINT)

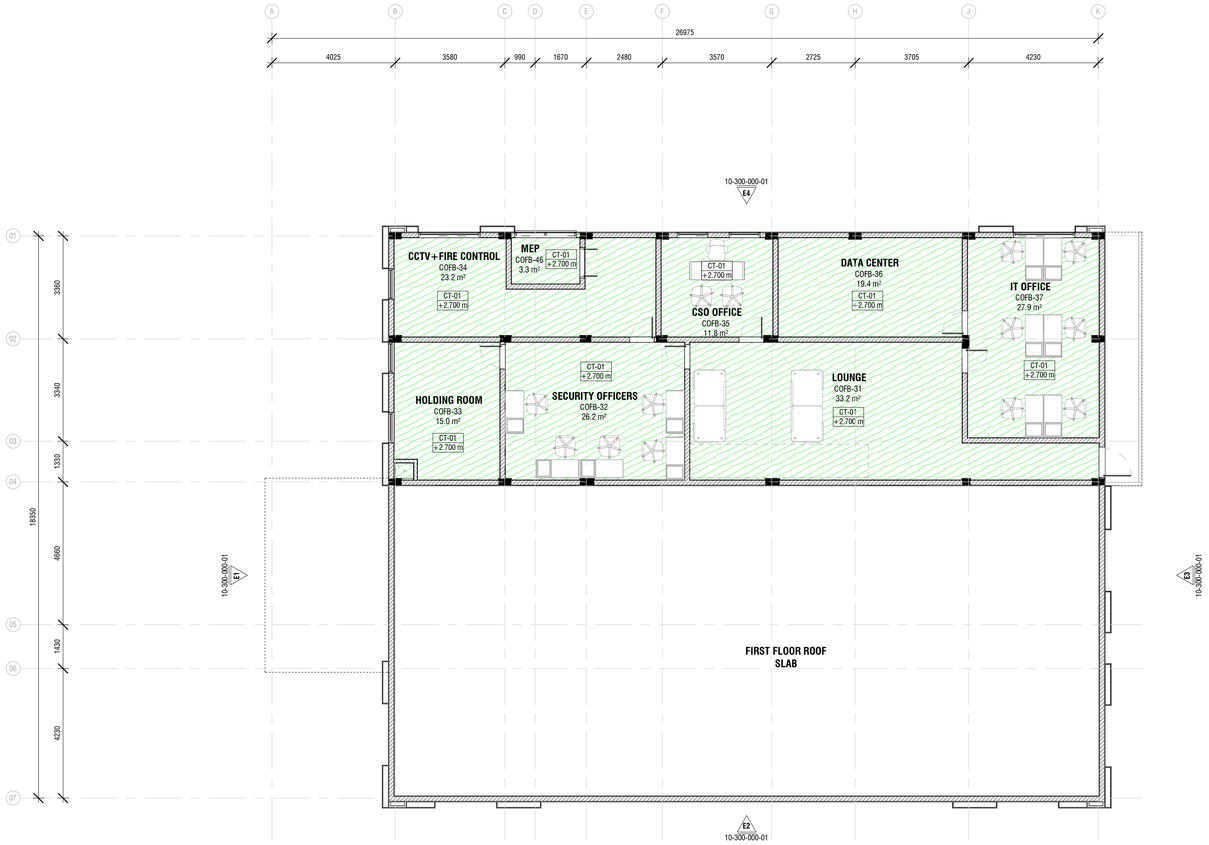

REFLECTED CEILING PLAN - FIRST FLOOR
1 : 100

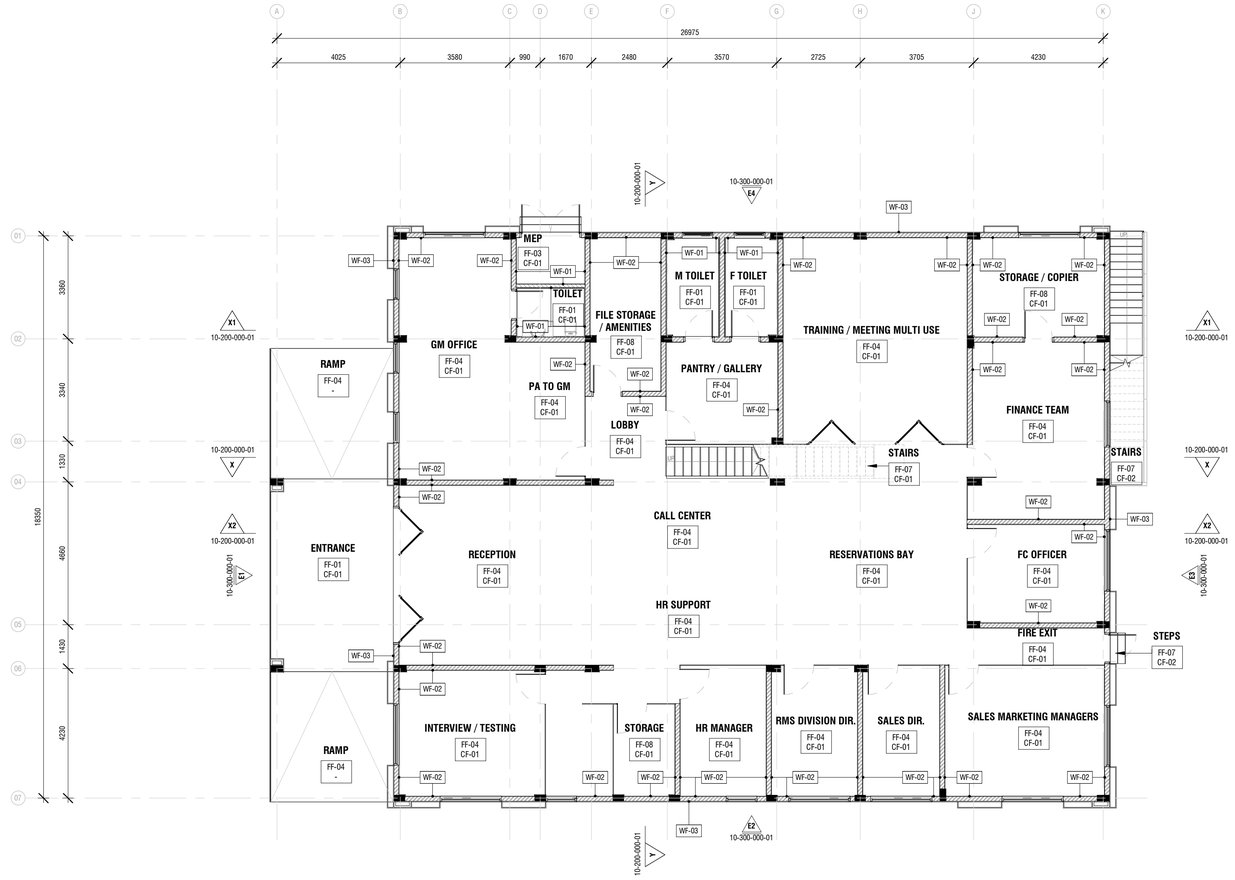

GROUND FLOOR PLAN

1 : 100

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
FLOOR FINISH				
FF-01	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mm, 8.5mm THICK	
FF-02	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mm, 8.5mm THICK	
FF-03	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mm, 8.5mm THICK	
FF-04	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mm, 8.5mm THICK	
FF-05	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600mm, 8.5mm THICK	
FF-06	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600mm, 8.5mm THICK	
FF-07	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	1200mmX300mm, 8.5mm THICK	
FF-08	EPOXY PAINT FINSH	TWO COMPONENT EPOXY POLYAMIDE FLOOR FINISH 9-11 Sq.m/liter THICKNESS 60-70 MICRON	IDEAL ABRASION AND IMPACT RESISTANCE TO MOST OF CHEMICALS	
FF-15	TERRACE FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-	

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
WALL FINISH				
WF-01	PORCELAIN TILES	STRUCTURE - SMOOTH LAPPATO SURFACE LOOK - MATT FINISH	300mmX600mm, 8.5mm THICK	
WF-02	INTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE / ANTI-MOULD & ANTI-FUNGUS	
WF-03	EXTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE /ZX LONGER PROTECTION AGAINST-COLOUR FADING, DIRT & DUST, ALKALI, ALGAE & FUNGUS	

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
CEILING FINISH				
CF-01	INTERIOR CEILING PAINT	HEAVY METAL FREE FINISH - MATT FINISH	FAST DRYING, ANTI-MOULD PROPERTIES WITH ABROAD-SPECTRUM PROTECTION AGAINST MOST SPECIES OF MOULD	
CF-02	EXTERIOR CEILING PAINT/ SLAB SOFFIT PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE /ZX LONGER PROTECTION AGAINST-COLOUR FADING, DIRT & DUST, ALKALI, ALGAE & FUNGUS	

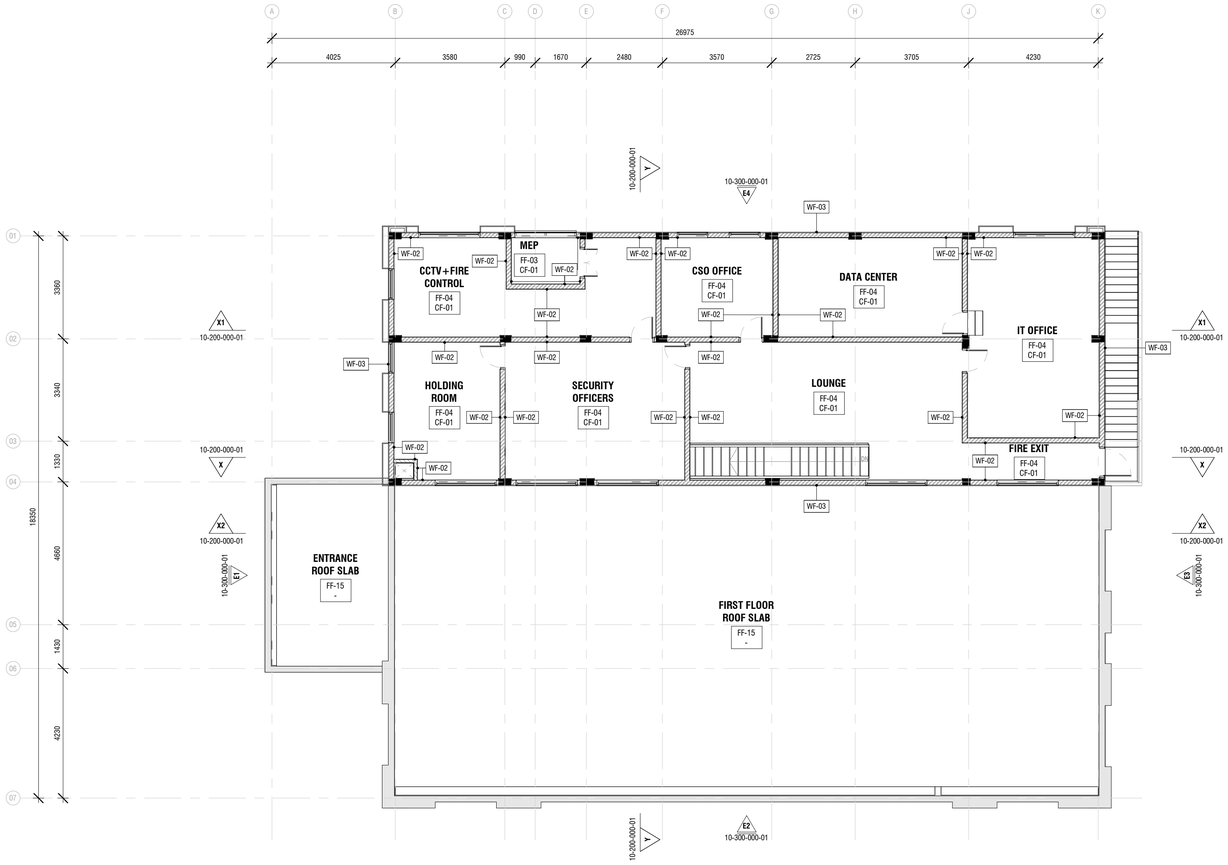

FIRST FLOOR PLAN

1 : 100

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
FLOOR FINISH				
FF-01	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mm, 8.5mm THICK	
FF-02	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mm, 8.5mm THICK	
FF-03	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	600mmX600mm, 8.5mm THICK	
FF-04	PORCELAIN TILES - FULL BODY	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R9	600mmX600mm, 8.5mm THICK	
FF-05	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600mm, 8.5mm THICK	
FF-06	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - LAPPATO SLIP RATING - R9	1200mmX600mm, 8.5mm THICK	
FF-07	PORCELAIN TILES	STRUCTURE - SMOOTH SURFACE LOOK - MATT FINISH SLIP RATING - R10	1200mmX300mm, 8.5mm THICK	
FF-08	EPOXY PAINT FINSH	TWO COMPONENT EPOXY POLYAMIDE FLOOR FINISH 9-11 Sq.m/liter THICKNESS 60-70 MICRON	IDEAL ABRASION AND IMPACT RESISTANCE TO MOST OF CHEMICALS	
FF-15	TERRACE FLOOR FINISH	(NEED TO CONTACT WITH ID TEAM)	-	

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
WALL FINISH				
WF-01	PORCELAIN TILES	STRUCTURE - SMOOTH LAPPATO SURFACE LOOK - MATT FINISH	300mmX600mm, 8.5mm THICK	
WF-02	INTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE / ANTI-MOULD & ANTI-FUNGUS	
WF-03	EXTERIOR PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE /2X LONGER PROTECTION AGAINST-COLOUR FADING, DIRT & DUST, ALKALI, ALGAE & FUNGUS	

FINISHES- LEGEND

FINISH TYPE	FINISH ITEM	DESCRIPTION	DIMENSIONS/SPEC	IMAGE
CEILING FINISH				
CF-01	INTERIOR CEILING PAINT	HEAVY METAL FREE FINISH - MATT FINISH	FAST DRYING, ANTI-MOULD PROPERTIES WITH ABROAD-SPECTRUM PROTECTION AGAINST MOST SPECIES OF MOULD	
CF-02	EXTERIOR CEILING PAINT/ SLAB SOFFIT PAINT	FINISH - MATT COVERAGE - 10-11 SQM/L COATS - 2	WASHABLE/ EASY WIPE /2X LONGER PROTECTION AGAINST-COLOUR FADING, DIRT & DUST, ALKALI, ALGAE & FUNGUS	

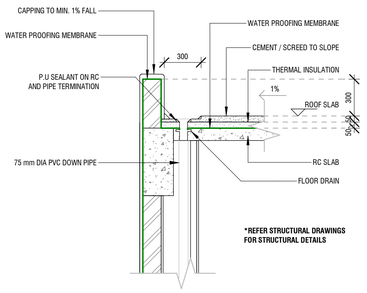

TYPICAL ROOF & FLOOR DRAIN DETAIL - 02

1 : 25

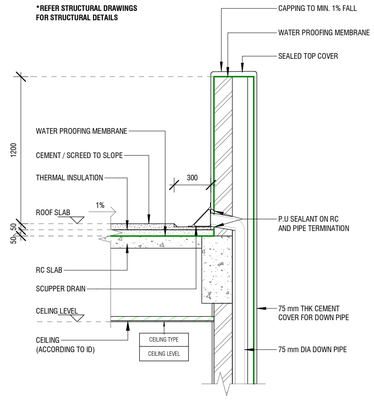

TYPICAL ROOF & SCUPPER DRAIN DETAIL - 03

1 : 25

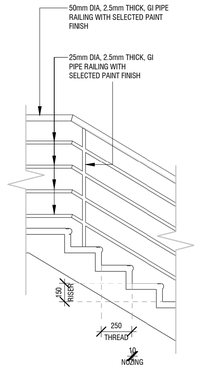

TYPICAL STAIR & HANDRAIL DETAIL - 04

1 : 25

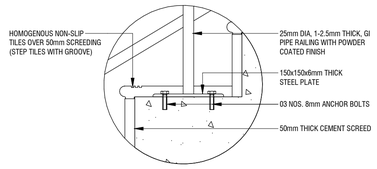

TYPICAL STAIRCASE DETAIL



TYPICAL STAIRCASE STEP DETAIL - 04

1 : 20

***REFER STRUCTURAL DRAWINGS FOR STRUCTURAL DETAILS**

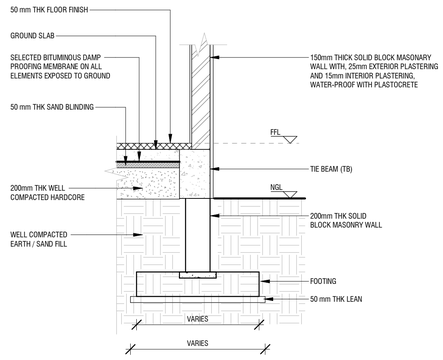

TYPICAL FLOOR TO WALL DETAIL - 01

1 : 25



***REFER STRUCTURAL DRAWINGS FOR STRUCTURAL DETAILS**

TYPICAL OPEN STAIRCASE STEP DETAIL - 05

1 : 20